

1:10 Scale Electric 2WD Off Road Race Truck Manual & Catalog,,,

TEAM ASSOCIATED



:: Introduction

Thank you for purchasing this Team Associated product. This manual contains instructions and tips for building and maintaining your new SC10. Please take a moment to read through it and familiarize yourself with these steps. We are continually changing and improving our designs; therefore, actual parts may appear slightly different than the illustrations. New parts will be noted on supplimentary sheets located in the appropriate parts bags. Check each bag for these sheets before you start to build.

:: SC10 Features

- XP3-SS 2.4 GHz radio system
- XP SC450-BL Brushless Electronic Speed Control
- Reedy 3300kV Brushless Motor
- '09 Championship 0.040" polycarbonate Short Course Body with decal kit
- Ball Bearing 17 turn Radon motor
- 30 degree caster blocks and gold front springs come standard
- Updated chassis and front suspension arms for increased durability
- Updated rear wheels with more drive pin support
- Built on 6-time National Champion RC10 T4 Platform
- KMC style wheels front and rear
- Aggressive tread multi-terrain scale tire with re-enforced sidewalls
- Realistic bumpers front and rear for maximum durability
- Rubber AE logo mud flaps

- 2.6:1 Ratio Gearbox equipped with sealed gear differential
- Dual-sided externally adjustable slipper clutch
- Molded composite low-CG chassis
- Set-screw to secure antenna tube
- Hinged battery hold-down strap fits up to 8 cell battery pack
- Durable front and rear body mounts with adjustable heiaht
- Complete set of 14 rubber sealed ball bearings
- Rugged steel turnbuckles
- Fully adjustable caster, camber, and toe-in
- Angled bellcrank "co-planar" steering
- Built in servo saver
- Vertical ball end adjustment, front and rear
- Blue aluminum shock bodies with molded pre-load clips
- Dog bone rear axles

:: Additional

:: SC10 RTR

Your new SC10 RTR comes factory assembled including radio gear, motor, and ESC. However, there are some items you will need to complete your kit.

Items needed:

- AA-size batteries for transmitter (x8)
- Peak Detection battery charger
- 6 cell NiMH battery pack or 2S LiPo battery pack w/Deans® Ultra Plug® connector

Tools included:

- Allen wrenches #6950 (.050", 1/16", 3/32", 5/64")
- 1.5mm allen wrench
- Molded tools #6956
- Camber gauge #1719
- Shock building tool #6429

:: Optional

Optional parts and gear to accessorize and maintain your SC10:

- Green Slime shock lube (AE Part # 1105)
- Cyanoacrylate glue (AE Part # 1597)
- Thread Locking Compound (AE Part # 1596)
- Silicone Shock Fluid (Refer to catalog for complete listings)
- Silicone Diff Fluid (Refer to catalog for complete listings)
- Body Scissors (AE Part # 1737)
- Reamer / Hole Punch
- FT Hex Wrenches (AE Part # 1541)

- Hobby Knife
- Needle Nose Pliers
- Wire Cutters
- Soldering Iron
- Calipers or a Precision Ruler
- FT Nut Driver Set (AE Part # 1561)

There is a 1:1 fold out in the back of the manual. Fold it out while building your kit for easy parts sizing!


 $^{igstyle \star}$ These Symbols Indicate


a special note or instructions.





Associated Electrics, Inc. 26021 Commercentre Dr. Lake Forest, CA 92630


Customer Service Tel: 949.544.7500 Fax: 949.544.7501

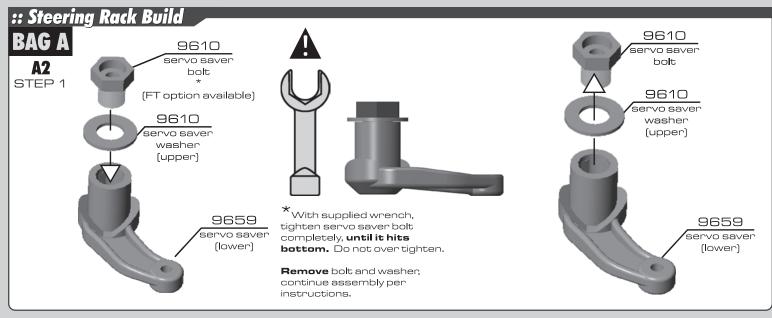


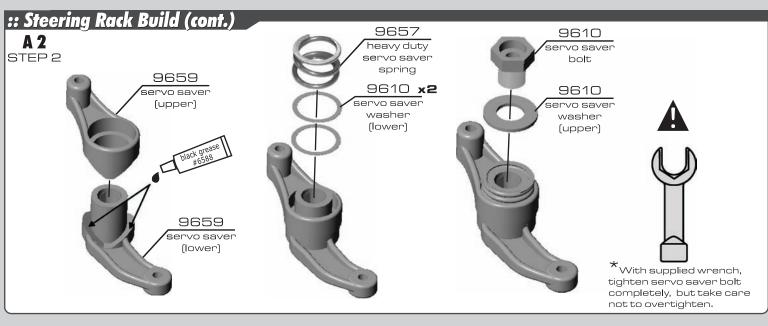


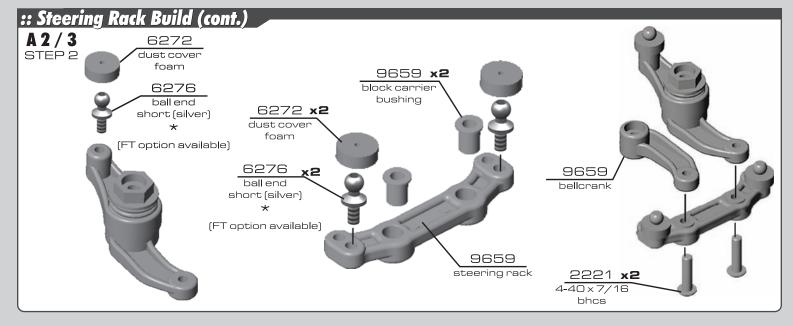


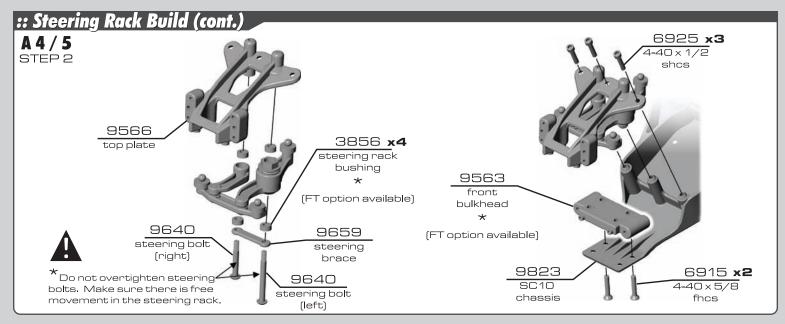


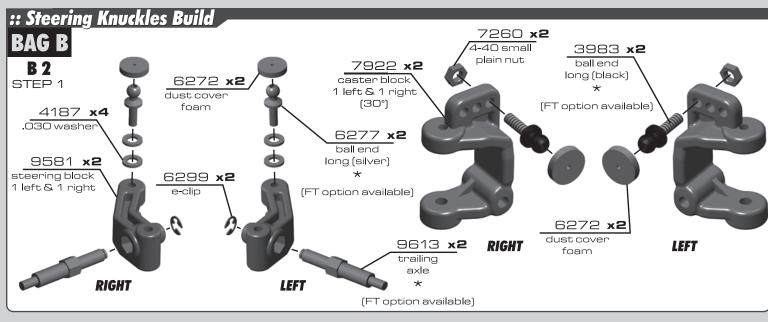


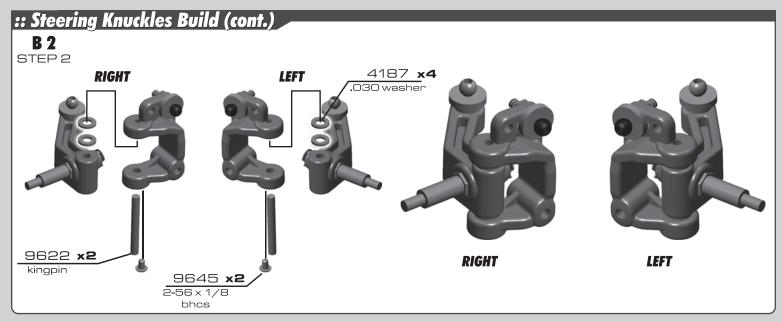


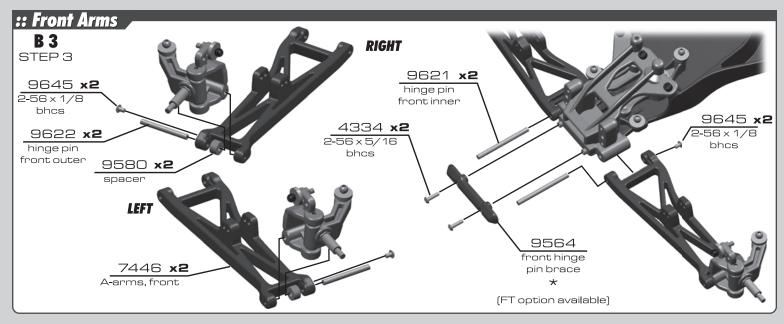

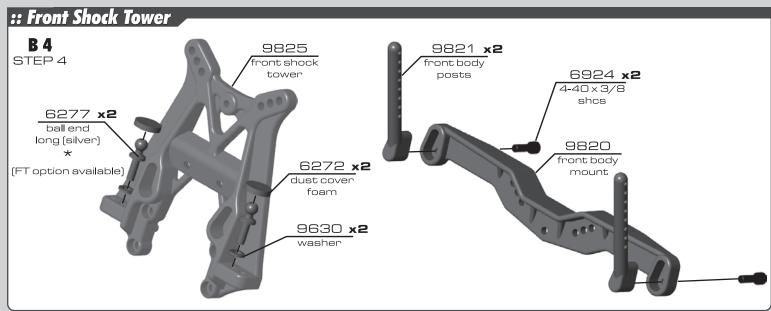


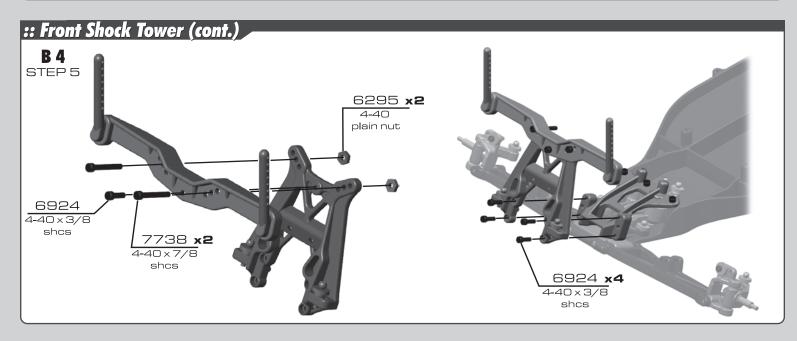


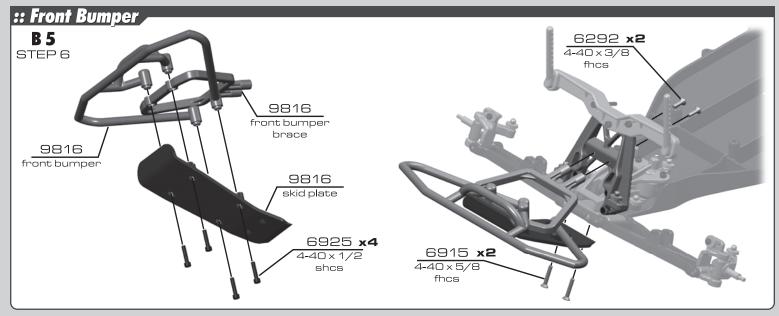


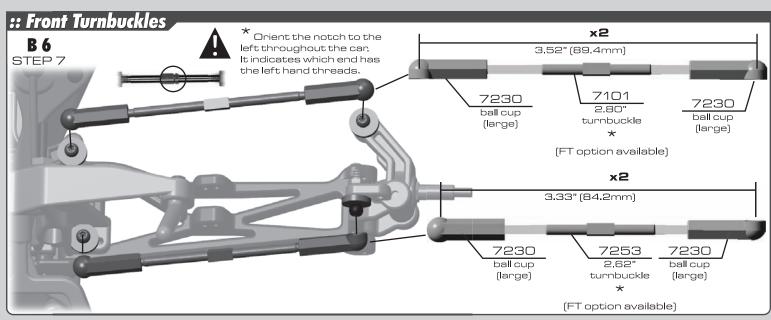





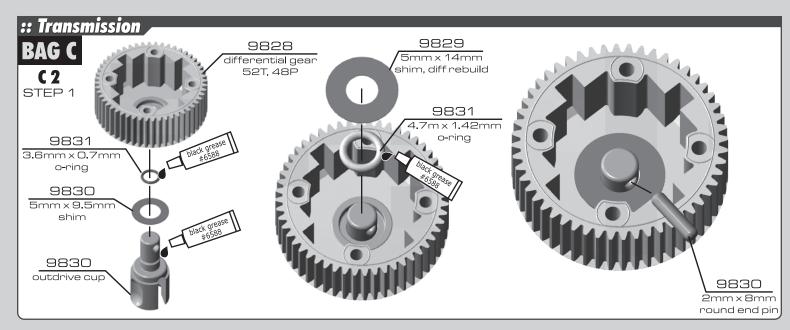


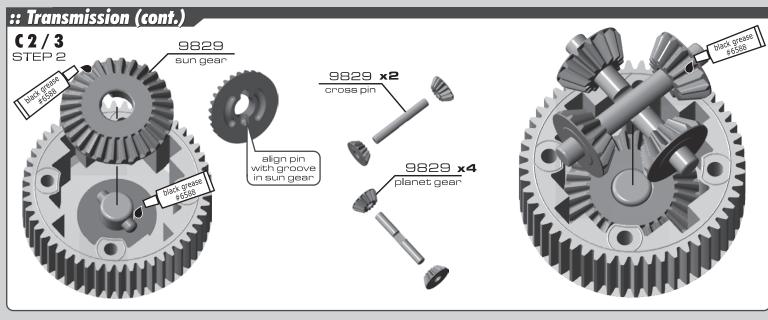


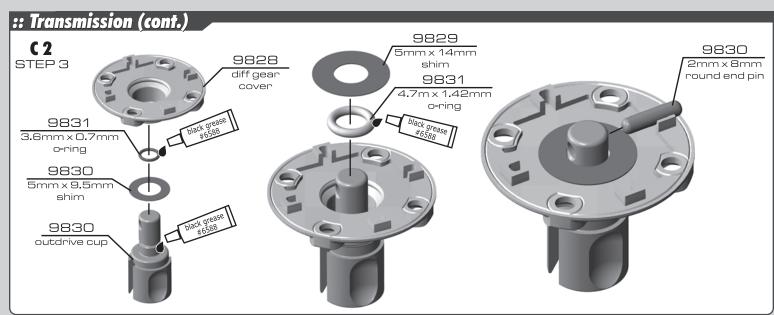


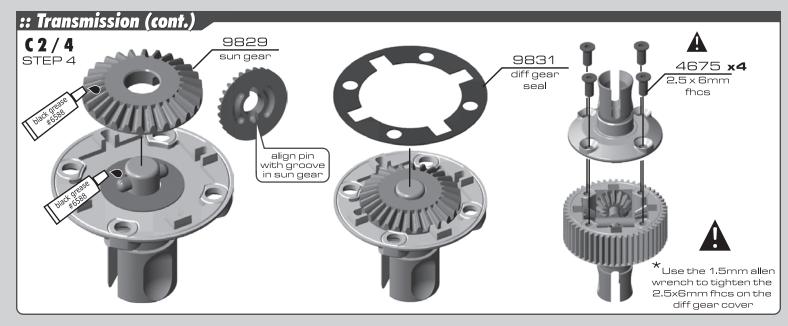


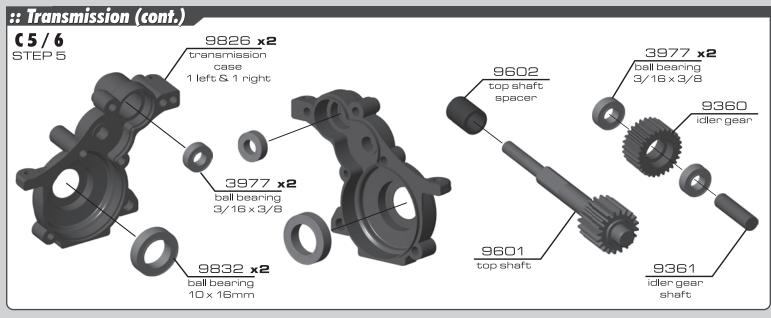


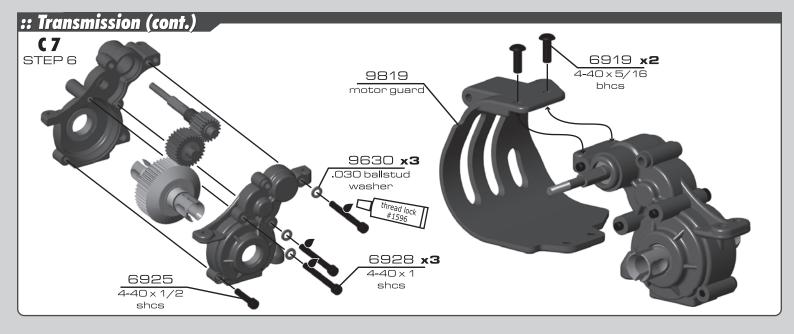


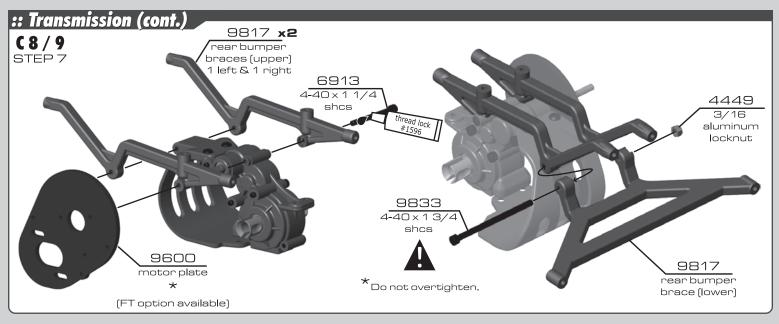


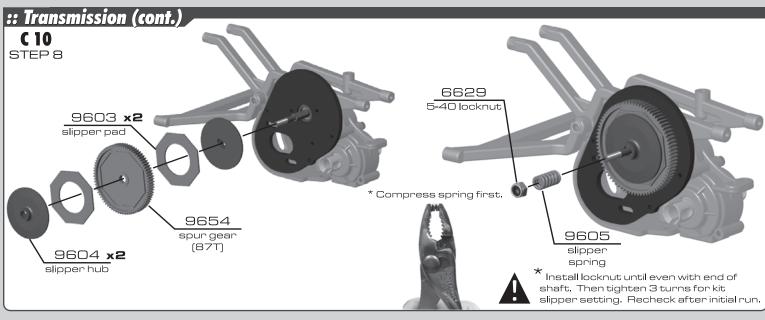


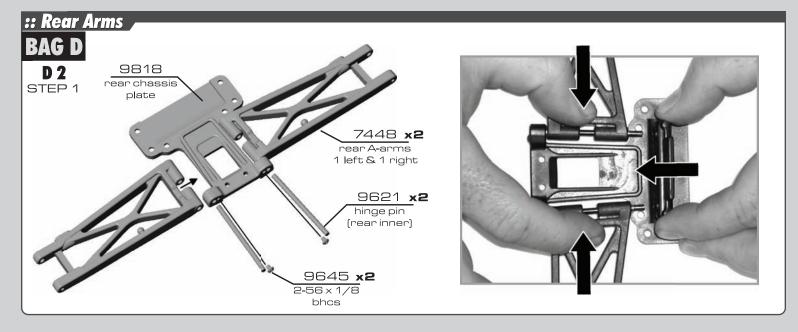


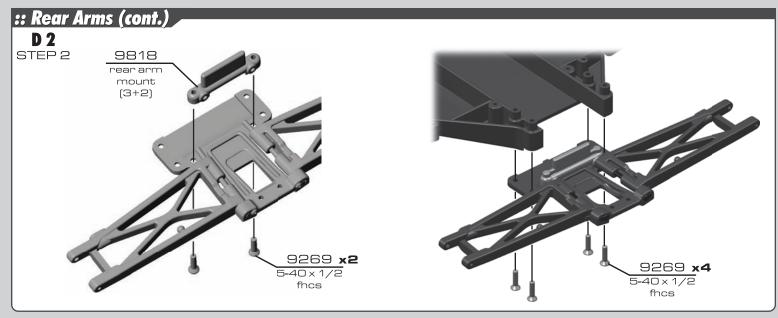


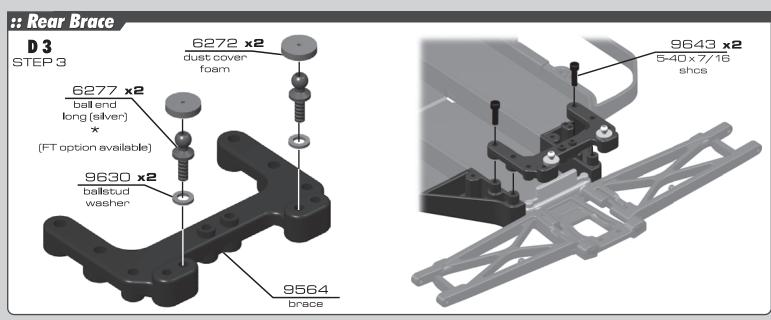


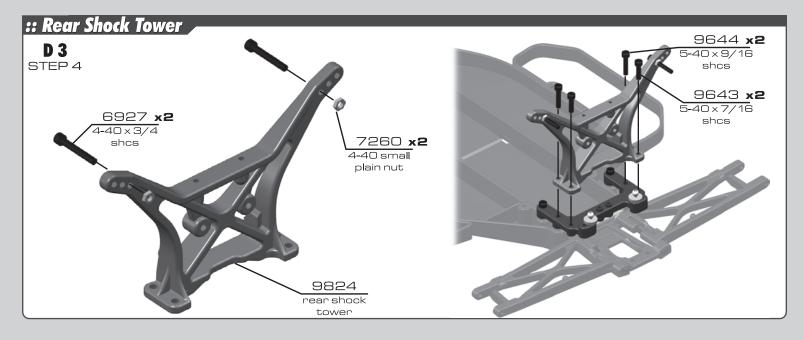


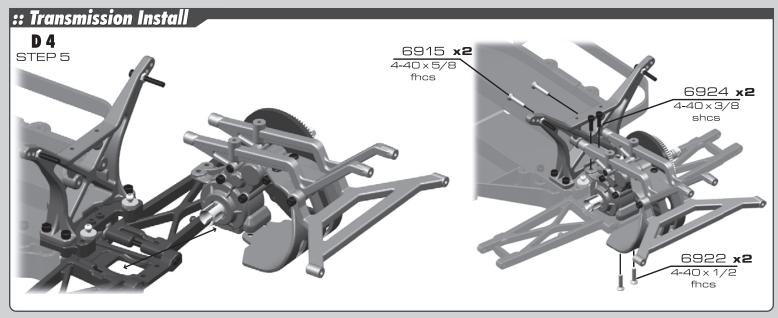


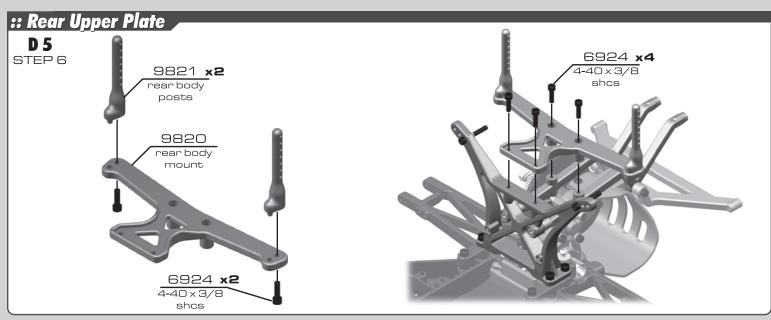


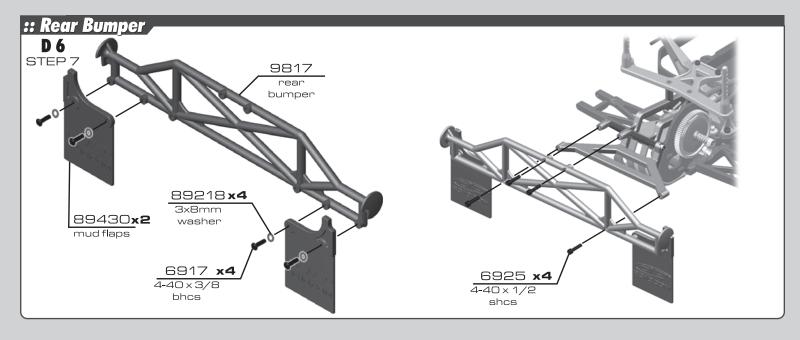


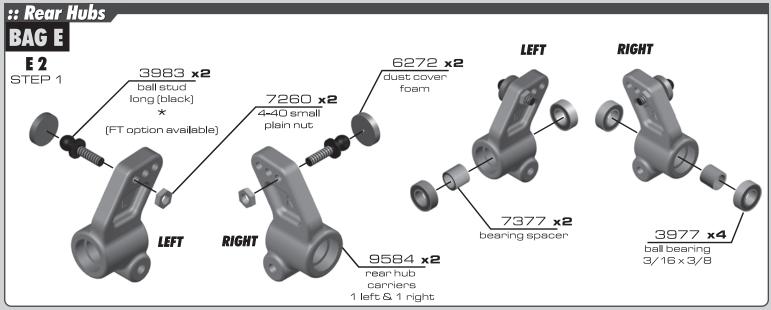


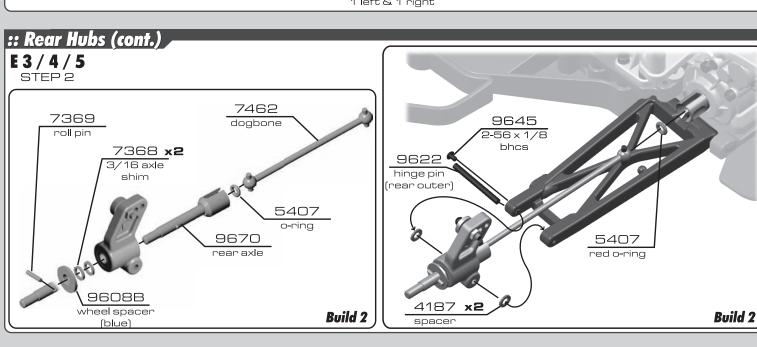


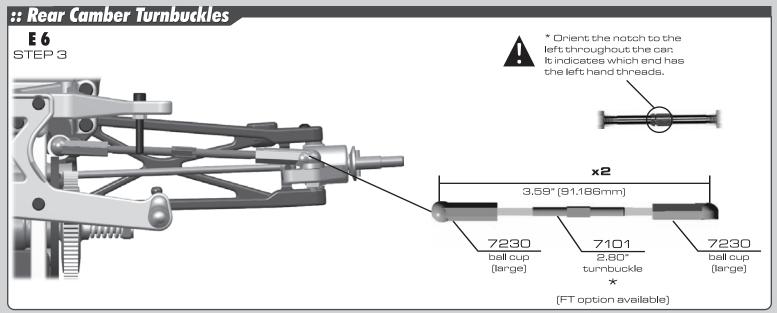


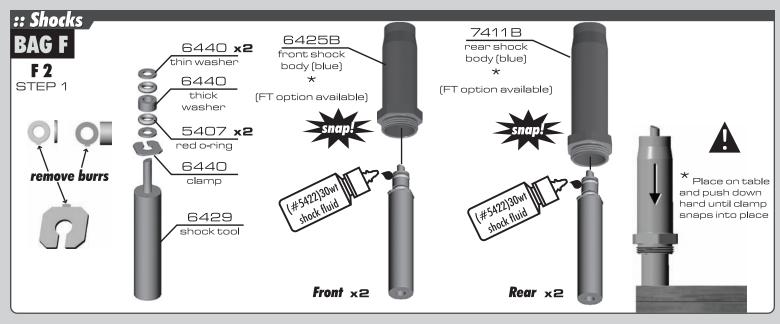


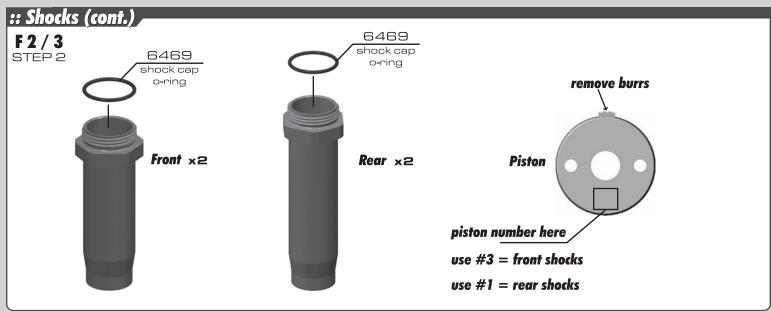


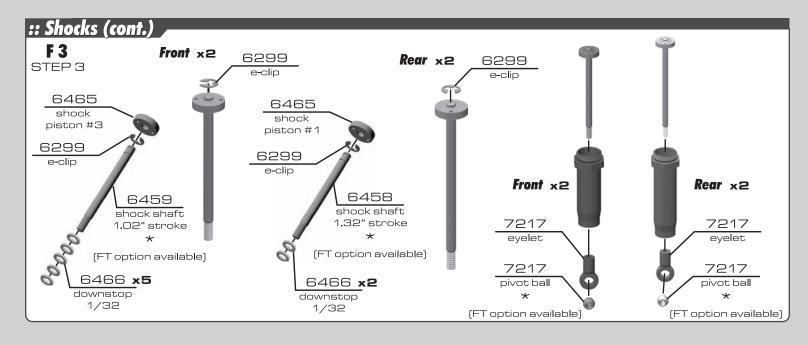


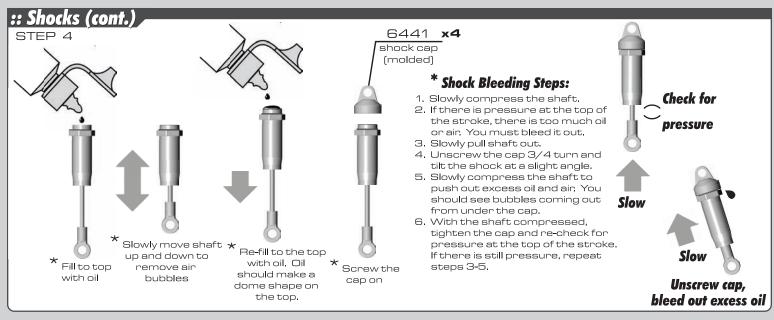


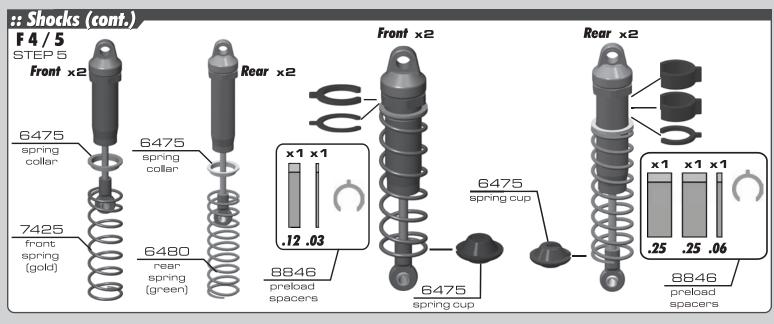


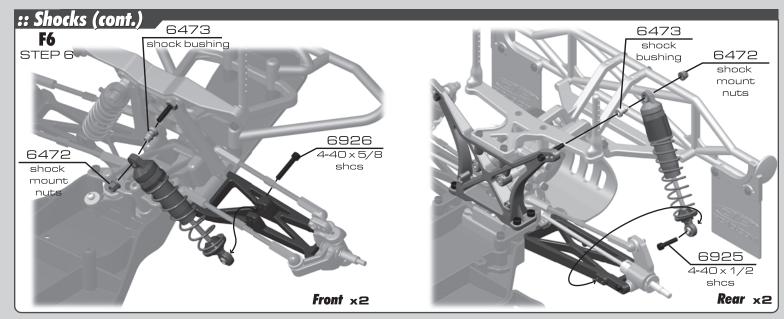


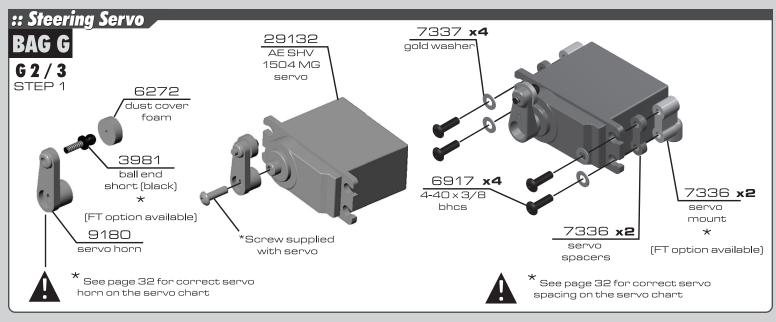


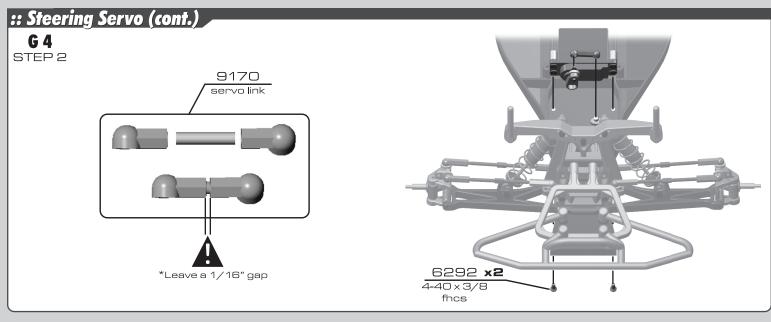


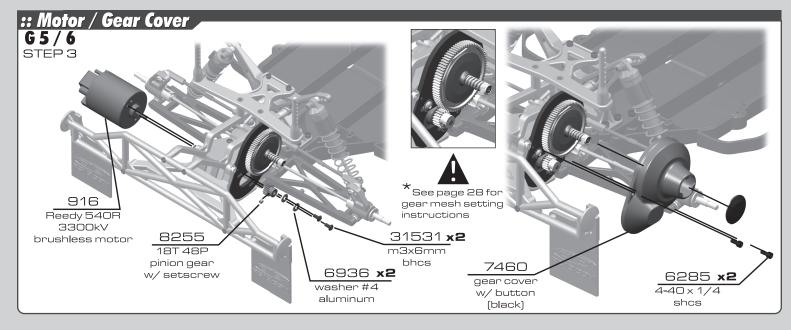


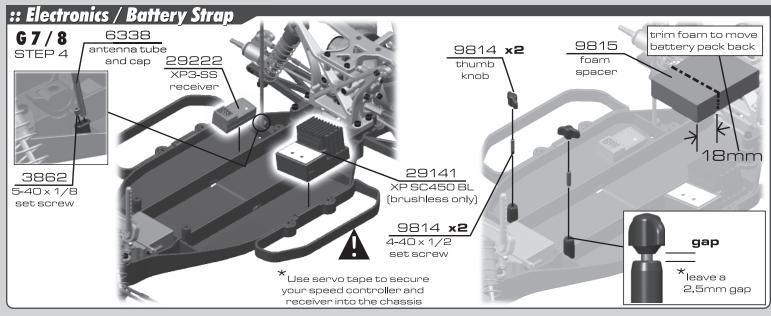


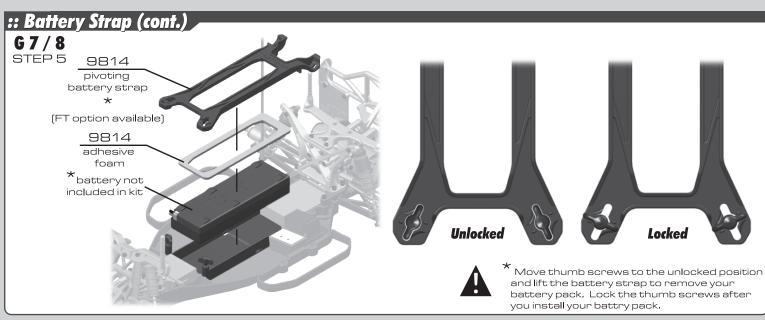

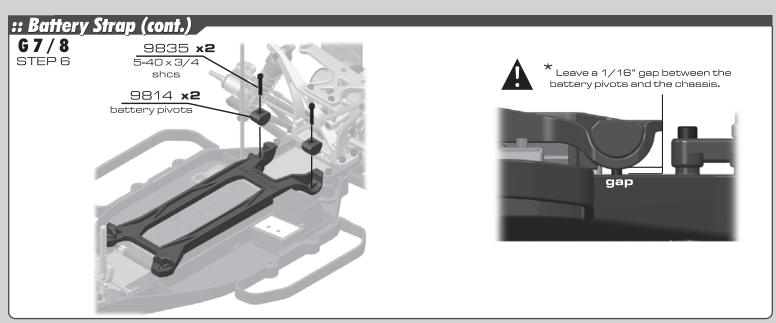


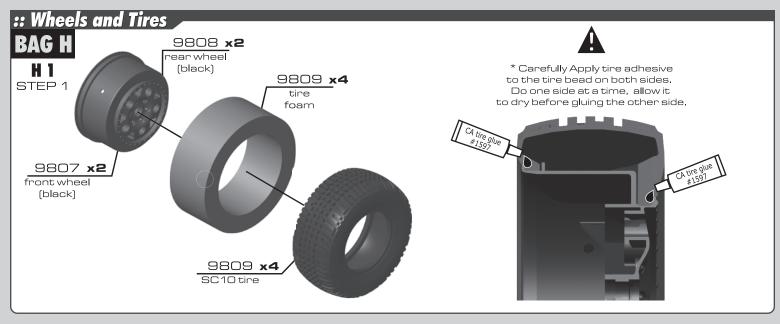


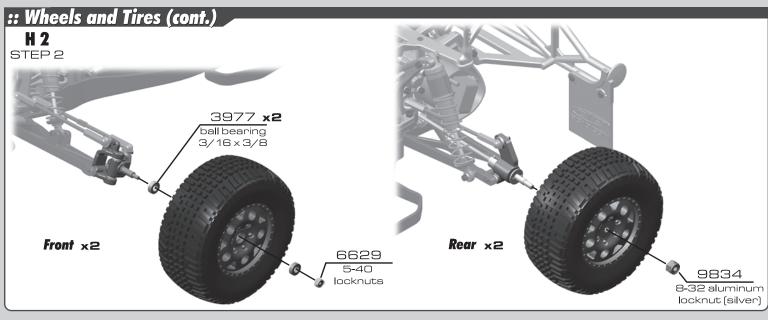

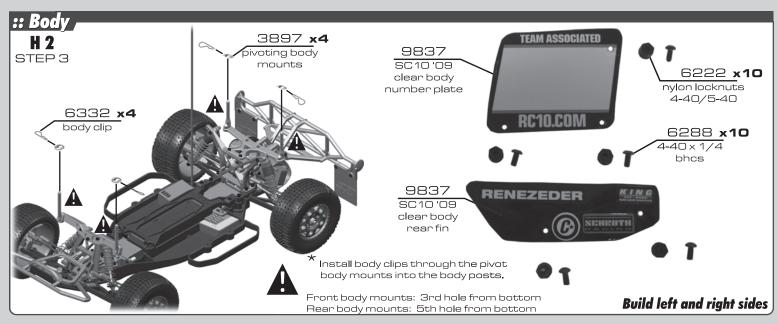

:: Body (cont.)

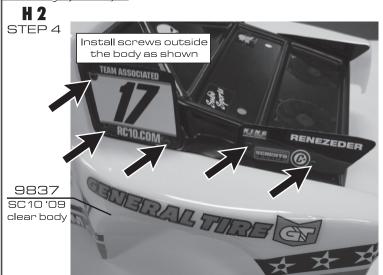

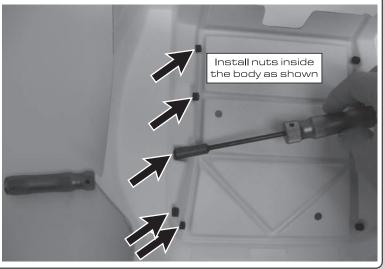

:: Body (cont.)

H2 STEP5



6332 **x4**




:: Final Adjustments

Use the following steps to make the final adjustments on your truck.

- 1. Turn the transmitter on.
- 2. Make sure the motor is disconnected.
- 3. Connect your battery pack and turn the power switch on.
- **4.** Move the steering control on the transmitter to the right and left. Do the wheels move in the correct direction? If not, you must reverse the steering servo direction on your transmitter (see transmitter manual).
- **5.** Adjust your steering trim (see radio manual) until the steering rack is centered under the top plate. Then, using the two steering turnbuckles, adjust the front wheels so they are pointing straight ahead.
- **6.** Adjust the ESC (electronic speed control) according to the speed control manufacturer's instructions. **Some manufacturers have the motor**

 $\textbf{connected during adjustment and some do not.} \ \ \text{Now turn the power switch off.}$

- 7. Connect the motor. Place your car on a block or car stand so that all four wheels are elevated. Turn the power switch on again. Check the throttle, brake, and steering settings you have made and then turn the power switch back off.
- 8. Remember this! The transmitter is always the FIRST TO BE TURNED ON and THE LAST TO BE TURNED OFF.





Ch	a dea					
:: Sh					/ 470	6299
	Red O-Rings	8	4.479	6441	6473	6465
	1/8" E-Clips	12	6472	0		6299
	Front Shock Body, 1.02" stroke (blue)	-	-		,	-
	Shock Rebuild Kit, for 4 shocks	1	646		1	6440
6441	Shock Cap, Molded	4	front		4	6440 S
6458	Shock Shaft, 1.32" stroke	1	64251	3		6440
	Shock Shaft, 1.02" stroke	-	rear			5407
6465	Shock Pistons, 4 each of #1,2, & 3	1	74111	3		6440
	Shock Down Stops, Set	- 1	0014		0	2
	Black Shock Cap O-Ring	4	8846		ŗ	£
	Shock Mount Nut	4	6475			front 6459
6473	Shock Bushings	4	01/3			rear
6475	Preload Spacers, Collars & Cups	1	front	E	>	6458
	4 thicknesses, 4 sets each		7428	\approx	>	- 1
	4-40 x 1/2" SHCS	6	rear			
	4-40 x 5/8" SHCS	6	6480	\approx	5	
	Shock Rod Ends / Plastic Pivot Balls	2		\approx	}	6466 👄
	Rear Shock Body, 1.39" stroke (blue)	1	6475			
8846	Preload Spacers, 4 each of 4	1	04/3	-		front
	different sizes		721	, \blacksquare	0	6926 rear
			/ / / 1	′ 🐷	7217	6925
e Sh	ock Springs					0.20
1580	Factory Team Truck Front Spring Kit.	pai	ir	1		
	of green, silver, blue, gold, and red fro					
1582	Factory Team Truck Front Spring Kit.			1		
	of green, silver, blue, gold, and red re					
6478	Rear Spring Silver 2.10 lb		·····3-	Pr.	K	
6480	Rear Spring Green 1.90 lb (Kit)			Pr.	×	
6481	Rear Spring Black 1.74 lb			Pr.	×	
6482	Rear Spring Gray 2.33 lb			Pr.	X	
7425	Front Spring Gold 3.70 lb (Kit)			Pr.	C	\leq
7426	Front Spring Black 2.765 lb			Pr.	C	\leq
7427	Front Spring Green 2.99 lb			Pr.	C	
7428	Front Spring Silver 3.225 lb			Pr.	×	
7429	Front Spring Blue 3.45 lb			Pr.	×	
7430	Front Spring Red 3.90 lb			Pr.	X	
7434	Rear Spring Blue 2.55 lb			Pr.		
7435	Rear Spring Gold 2.75 lb			Pr.		
7436	Rear Spring Red 2.95 lb			Pr.		
	ock Oil					
エヌニノート		OZ.				
	10 Weight Silicone Shock Oil 76					
5420	•	07				ı
5420 5421	20 Weight Silicone Shock Oil 2	OZ.				
5420 5421 5422	20 Weight Silicone Shock Oil 20 Weight Silicone Shock Oil 20	OZ.				
5420 5421 5422 5423	20 Weight Silicone Shock Oil 20 30 Weight Silicone Shock Oil 20 40 Weight Silicone Shock Oil 20	OZ. OZ.				
5420 5421 5422 5423 5425	20 Weight Silicone Shock Oil 30 Weight Silicone Shock Oil 40 Weight Silicone Shock Oil 80 Weight Silicone Shock Oil 20	OZ. OZ. OZ.		P	crory	
5420 5421 5422 5423 5425 5427	20 Weight Silicone Shock Oil 30 Weight Silicone Shock Oil 40 Weight Silicone Shock Oil 80 Weight Silicone Shock Oil 15 Weight Silicone Shock Oil 20	0Z. 0Z. 0Z. 0Z.		3	cron [26	
5420 5421 5422 5423 5425 5427 5428	20 Weight Silicone Shock Oil 30 Weight Silicone Shock Oil 40 Weight Silicone Shock Oil 80 Weight Silicone Shock Oil 15 Weight Silicone Shock Oil 25 Weight Silicone Shock Oil 26 Weight Silicone Shock Oil	OZ. OZ. OZ. OZ.				an Q
5420 5421 5422 5423 5425 5427 5428 5429	20 Weight Silicone Shock Oil 30 Weight Silicone Shock Oil 40 Weight Silicone Shock Oil 80 Weight Silicone Shock Oil 15 Weight Silicone Shock Oil 25 Weight Silicone Shock Oil 35 Weight Silicone Shock Oil 26	OZ. OZ. OZ. OZ. OZ.				
5420 5421 5422 5423 5425 5427 5428 5429 5430	20 Weight Silicone Shock Oil 30 Weight Silicone Shock Oil 40 Weight Silicone Shock Oil 80 Weight Silicone Shock Oil 15 Weight Silicone Shock Oil 25 Weight Silicone Shock Oil 35 Weight Silicone Shock Oil 45 Weight Silicone Shock Oil 26 Weight Silicone Shock Oil 27 Weight Silicone Shock Oil 28 Weight Silicone Shock Oil 29 Weight Silicone Shock Oil	OZ. OZ. OZ. OZ. OZ.		SHO	CK FL	
5420 5421 5422 5423 5425 5427 5428 5429 5430 5431	20 Weight Silicone Shock Oil 30 Weight Silicone Shock Oil 40 Weight Silicone Shock Oil 80 Weight Silicone Shock Oil 15 Weight Silicone Shock Oil 25 Weight Silicone Shock Oil 35 Weight Silicone Shock Oil 45 Weight Silicone Shock Oil 55 Weight Silicone Shock Oil 26 27 28 29 20 20 20 20 20 20 20 20 20 20 20 20 20	oz. oz. oz. oz. oz. oz.		SHO DISTRIBUTE SHOPE SHOP SHOPE SHOP	CK FL BLEND SI	UID
5420 5421 5422 5423 5425 5427 5428 5429 5430 5431 5435	20 Weight Silicone Shock Oil 30 Weight Silicone Shock Oil 40 Weight Silicone Shock Oil 80 Weight Silicone Shock Oil 15 Weight Silicone Shock Oil 25 Weight Silicone Shock Oil 35 Weight Silicone Shock Oil 45 Weight Silicone Shock Oil 55 Weight Silicone Shock Oil 20 21 22 23 24 25 26 26 27 27 28 29 20 20 20 20 20 20 20 20 20 20 20 20 20	DZ.		SHO GITTOM IS 422:	CK FL BLEWD SIN 4 AOWE.	OLIUM LICOM 201.
5420 5421 5422 5423 5425 5427 5428 5429 5430 5431	20 Weight Silicone Shock Oil 30 Weight Silicone Shock Oil 40 Weight Silicone Shock Oil 80 Weight Silicone Shock Oil 15 Weight Silicone Shock Oil 25 Weight Silicone Shock Oil 35 Weight Silicone Shock Oil 45 Weight Silicone Shock Oil 55 Weight Silicone Shock Oil 50 Weight Silicone Shock Oil 20 21 22 23 24 25 Weight Silicone Shock Oil 26 26 27 28 29 20 20 20 20 20 20 20 20 20 20 20 20 20	oz. oz. oz. oz. oz. oz.		SHO SHOW IS 42:	CK FL BLEND STS 5 40WE.	UID

:: Transmission	
3977 Ball Bearing, 3/16" x 3/8"	2
6913 4-40 x 1 1/4" SHCS	6
6925 4-40 x 1/2" SHCS	6
6928 4-40 x 1" SHCS	6
9360 Idler Gear, molded	1
9361 Idler Gear Shaft	1
9600 B4/T4 Motor Plate	1
9601 B4/T4 Top Shaft	1
9602 B4/T4 Top Shaft Spacer	1
9630 Ball End Washer	10
9826 SC10 Transmission Case (left & right)	1
9832 Ball Bearing, 10 x 16mm	2
9826 9832 9832 9832 9832 9832	9630 6928 6913


:: Sl	ipper Clutch		:: Pinion				
6285	4-40 x 1/4 SHCS	12	8252 15T 48P Pinion Gear 1				
6629	5-40 Locknuts	6	8253 16T 48P Pinion Gear 1				
7460	Molded B4/T4 Gear Cover,	1	8254 17T 48P Pinion Gear 1				
	black (Kit)		8255 18T 48P Pinion Gear 1				
7461	Molded B4/T4 Gear Cover,	1	8256 19T 48P Pinion Gear 1				
	clear		8257 20T 48P Pinion Gear 1				
9603	B4/T4 Slipper Pad	2	8258 21T 48P Pinion Gear 1				
9604	B4/T4 Slipper Hub	1	8259 22T 48P Pinion Gear 1				
9605	B4/T4 Slipper Spring	1	8260 23T 48P Pinion Gear 1				
9650	75T 48P Spur Gear	1	8261 24T 48P Pinion Gear 1				
9651	81T 48P Spur Gear	1	8262 25T 48P Pinion Gear 1				
9652	78T 48P Spur Gear	1	8263 26T 48P Pinion Gear 1				
9653	84T 48P Spur Gear	1					
9654		1					
62	9654 87T 48P Spur Gear (Kit) 1						

:: Gear Differential 9827 Complete Gear Diff 9828 Diff Gear and Cover 9828 9829 Gear Diff Rebuild 9830 Gear Diff Outdrives, Set 9831 Gear Diff O-Ring Set 1 9831 9829 :: Diff Fluids 9829 5450 Silicone Diff Fluid 1000CST Silicone Diff Fluid 2000CST Silicone Diff Fluid 3000CST 9829 1 9829 9829 9829 5453 Silicone Diff Fluid 5000CST 9829 5454 Silicone Diff Fluid 7000CST 9828 5455 Silicone Diff Fluid 10000CST 9829 🐗 9830 9831 9830 9831 9830

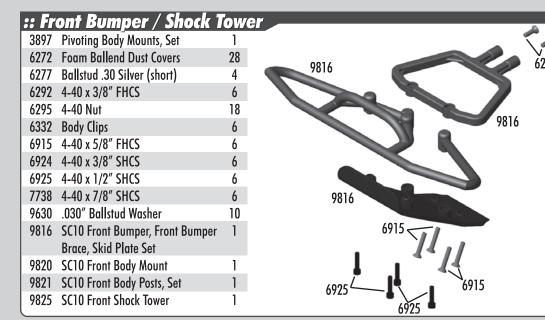


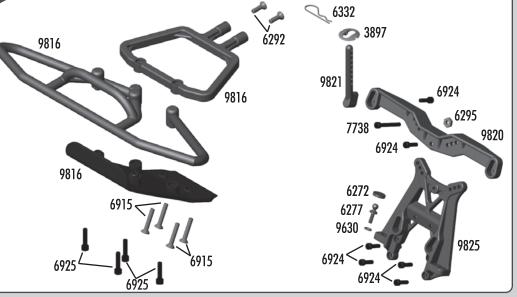


:: Fr	<u>ont Arms / Steering</u>	
3977	Ball Bearing 3/16" x 3/8"	2
3983	Ballstud .30" Black (short)	6
4187	.030 Nylon Washers	12
6272	Foam Ballend Dust Covers	28
6277	Ballstud .30 Silver (short)	4
6299	1/8" E-Clip	12
6629	5-40 Locknut	6
7260	4-40 Plain Nut	12
7446	T4 Front A-Arm (left & right)	Pr.
7922	30° Caster Blocks (left & right)	Pr.
9580	Caster Block Spacers, Set	1
9581	Trailing Steering Block	Pr.
9613	B4 Trailing Axle	2
9621	B4 Inner Hinge Pin Set	1
9622	B4 Outer Hinge Pin Set	1
9645	2-56 x 1/8" BHCS	8

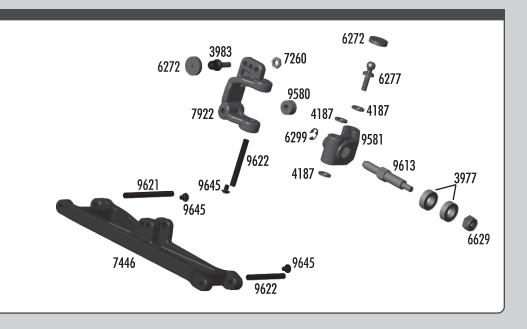

:: Front Bulkhead 2221 4-40 x 7/16" BHCS 6 1 3856 Steering Bushings, Set 6272 Foam Ball end Dust Covers 28 6276 Ballstud .20" Silver (short) 6 6925 4-40 x 1/2" SHCS 6 9566 B4 / T4 Top Plate 9610 Servo Saver / Steering Hardware 9640 B4 / T4 Steering Bolt, left & right 9657 B4 / T4 HD Servo Saver Spring 1 9659 B4 / T4 Steering Set. Includes Rack, Bellcrank, Servo Saver, Steering Brace

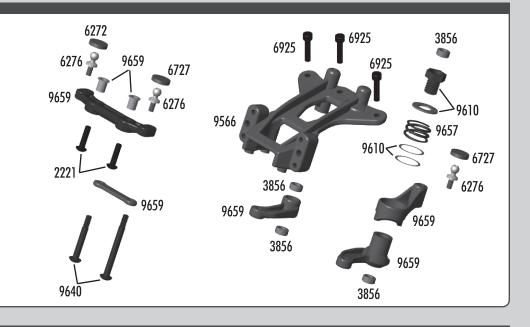


:: Turnbuckles / Servo 3981 Ballstud .20" Black (short) 6 6272 Foam Ballend Dust Cover 28 6292 4-40 x 3/8" FHCS 6 4-40 x 3/8" BHCS 6917 6 7101 Turnbuckle 2.80" Pr. 7230 Ballcups, large 12 7253 Turnbuckle 2.62" Pr. Servo Mount Set 7336 **Gold Washer** 7337 4 9170 B4 / T4 Servo Link 1 9180 Servo Horns Set

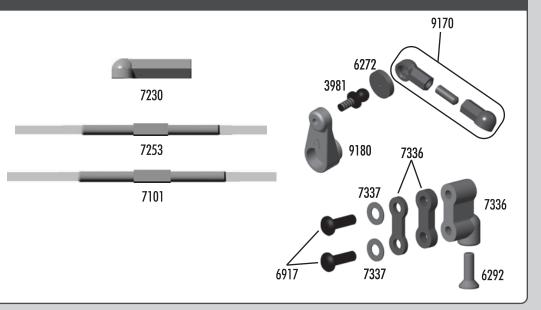



9814 Battery Strap and Hardware 1 Includes Battery Strap, Adhesive Foam, Thumb Knobs, Strap Pivots, & Hardware

9815 SC10 Foam Battery Spacer 9835 5-40 x 3/4" SHCS




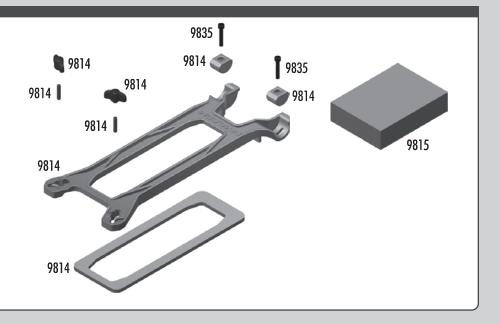


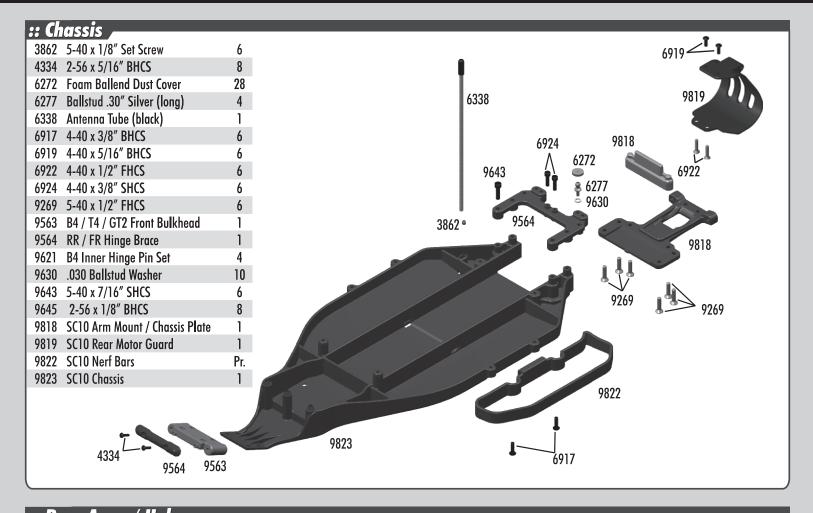

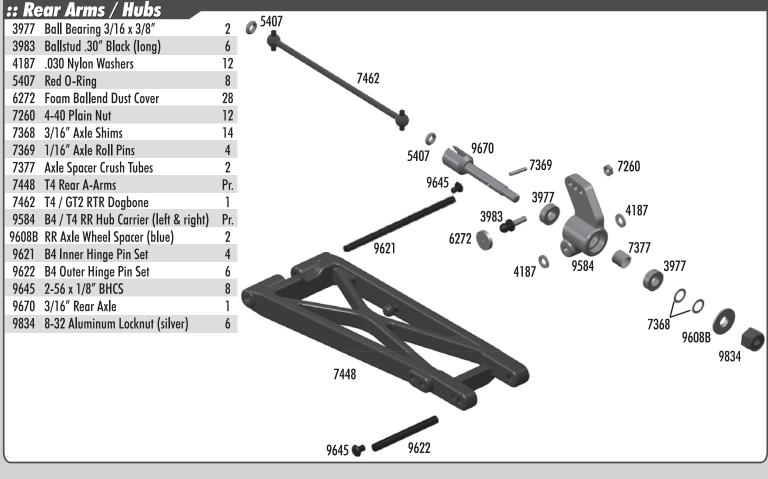

:: Rear Shock Tower 3897 Pivoting Body Mounts, Set 6332 **Body Clips** 6 6915 4-40 x 5/8" FHCS 6 6924 4-40 x 3/8" SHCS 6927 4-40 x 3/4" SHCS 6 12 7260 4-40 Plain Nut 9643 5-40 x 7/16" SHCS 6 9644 5-40 x 9/16" SHCS 6 9820 SC10 Body Mounts FR / RR 1 9821 SC10 Body Posts, Set 9824 T4 / SC10 Rear Shock Tower 1

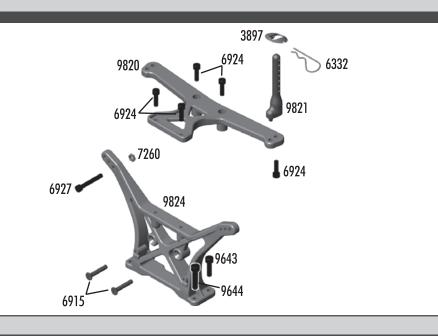

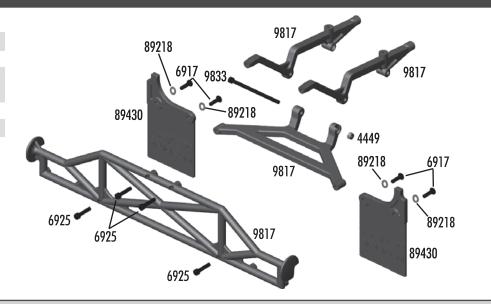


:: Wheels / Tires 9805 SC10 KMC Wheel FR (silver) 2 9806 SC10 KMC Wheel RR (silver) 2 9807 SC10 KMC Wheel FR (black) (Kit) 2 9808 SC10 KMC Wheel RR (black) (Kit) 2 9809 SC10 Tire with Foam Insert 2 9810 SC10 Tire / Wheel FR (silver) 2 9811 SC10 Tire / Wheel RR (silver) 2 9812 SC10 Tire / Wheel FR (black) 2 9813 SC10 Tire / Wheel RR (black)



:: Fa	ctory Team and Option Parts	
	FT T4 Ti Turnbuckle Set	1_
	FT Ti Turnbuckle, 2.00" (blue)	Pr.
	FT Ti Turnbuckle, 2.65" (blue) for front steering	Pr.
1409	FT Ti Turnbuckle, 1" (sway bar) (blue)	Pr.
1417	FT Ti Turnbuckle, 2.80" (blue) for front / rear camber	Pr.
1585	FT B4 Aluminum Trailing Axle	Pr.
1598	FT Blue Aluminum Shock Caps, (blue) see also #6439	4
1654	FT Solid Axle Pins	4
1734	FT Blue Body Clip, 4 long, 6 short	10
1735	FT Blue Body Clip, long	4
1736	FT Blue Body Clip, short	6
1770	FT Milled Aluminum Motor Plate, (blue)	1
1777	Blue Aluminum Shock Ball Ends with Eyelets, Set	1
1778	FT Milled Aluminum Motor Plate, (black)	1
1779	FT Servo Mounts, blue aluminum	Pr.
1780	FT Blue Aluminum Threaded Shock Bushings	4
1781	FT Rear Shock Bushing (short)	4
3438	8-32 LP Locknuts (blue)	3
3971	Steering Rack Bearings	4
6416	Gold Shock Shaft, 1.32" stroke	1
6417	Gold Shock Shaft, 1.02" stroke	i
6439	FT Blue Aluminum Shock Caps, (blue) see also #1598	j
6443	Bleeder Shock Caps, 1/10	4
6463	Shock Pistons, Blank	8
6906	Ball Bearing, PTFE Sealed 3/16 x 3/8"	2
	FT 4-40 Aluminum Locknuts (blue)	6
6943	FT 8-32 Aluminum Locknuts (blue)	6
7381	CVD Rebuild Kit	1
7412	Rear Threaded Shock Body, 1.39"	Pr.
7414	Front Threaded Shock Body, 1.02"	Pr.
	FT Threaded Shock Collar & O-Rings	Pr.
	T4 Front A-Arm, Carbon	Pr.
	T4 Rear A-Arm, Carbon	Pr.
7453	CVD Axle Bone T4 (black)	Pr.
7455	CVD Set T4	Pr.
7922	Caster Block 30 deg, (left & right) (Kit)	Pr.
7990	Aluminum Front Bulkhead (blue)	1
9565	B4 / T4 Chassis Brace, Hinge Pin Brace, Carbon	il
9567	B4 / T4 Top Plate, Carbon	i
9577	B4 / T4 Steering Block, Inline (left & right) (reg. #9623)	Pr.
9592	B4 / T4 Caster Block 20 deg, (left & right)	Pr.
9598	CVD Axles T4	Pr.
	FT B4 / T4 Aluminum Motor Plate (blue)	1
9608	RR Axle Wheel Spacer (silver)	Pr.
	B4 / T4 Blue Servo Saver Bolt	1
9623	FT B4 Front Inline Axle (reg. #9577)	Pr.
9633	FT T4 Front Threaded Shock Kit, 1.02"	Pr.
9634	FT T4 Rear Threaded Shock kit, 1.39"	Pr.
9635	B4 / T4 Sway Bar Kit. Includes color coded bars,	1 1
'005	soft (black), med (silver), hard (gold)	'
9665	FT B4 / T4 Aluminum Hinge Pin Brace V2	1
9674	T4 Shiny CVD Dogbone	Pr.
9789	SC10 / B4 FT Titanium Front Axles, Set	11.
\ // 0/	SCIO, DTTT I IIIUIIIUIII IIIUIII AAIGS, SGI	

:: Fa	ctory Team and Option	Parts (cont.)
9795	Ti Nitride Ballstuds 4-40 x .20 - long	Pr.	<u> </u>
9796	Ti Nitride Ballstuds 4-40 x .30 - long	Pr.	
9797	Ti Nitride Ballstuds 4-40 x .40 - long	Pr.	
9798	Ti Nitride Ballstuds 4-40 x .20 - short	Pr.	
9799	Ti Nitride Ballstuds 4-40 x .30 - short	Pr.	
9851	SC10 Battery Strap, Carbon	1	
:: Lu	bes and Adhesives		
1105	Green Slime Shock Lube	4cc	
1596	FT Locking Compound	10ml	-
1597	FT Tire Adhesive	.70oz	
6588	Black Grease	4cc	1596
6591	Diff Lube	4cc	Team
6636	Silicone Lube	4cc	
6727	Servo Tape Strips	2	

:: Bo	all Diff Transmission Option	
6573	Diff Thrust Washer & Bolt	2
6574	Precision Diff Thrust Balls, 5/64"	6
6575	Locking T-Nut, Diff Thrust Bolt, & Cover	1
6581	3/32" Carbide Diff Balls	12
6582	Diff Thrust Spring	1
6589	Ball Bearing, 5/32 x 5/16" unflanged	2
7664	Diff Gear 52T	1
7666	Diff Drive Rings, 2.60:1	2
7667	Diff Outdrive Hub, Right, 2.60:1	1
7668	Diff Outdrive Hub, Left, 2.60:1	1
	B4 / T4 / GT Diff Rebuild Kit	1
9574	B4 / T4 Transmission Case (left & right)	1
9852	SC10 Ball Diff Outdrives	1
9853	SC10 Complete Ball Differential	1
,,,,,		
6575		
-	6575	
	6574	

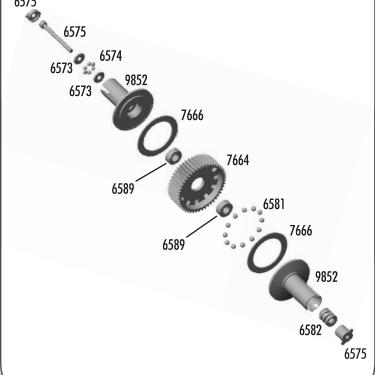

	ectronics	
	SHV1504 Servo	1
	SHV1504MG Servo	1
	XP SC200 ESC Forward / Reverse / Brake	i
	XP SC450BL Brushless ESC	i
	XP DS1313 Performance Digital Servo	i
	XP DS1015 Hi-Torque / Hi-Speed Digital Servo	i
	XP3-SS 2.4ghz Radio	i
	XP3-SS 2.4ghz Receiver	1
	eedy Motors	_
300		1
410	Flash 12-turn Modified	1
	Flash 13-turn Modified	
411		1
412	Flash 14-turn Modified	1
413	Flash 15-turn Modified	1
414	Flash 17-turn Modified	1
415	Flash 19-turn Modified	1
517	Challenger 19-turn ROAR Spec	1
916	540R Brushless Motor 3300kV	1
917	540R Brushless Motor 3900kV	1
918	540R Brushless Motor 4900kV	1
919	540R Brushless Motor 6100kV	1
936	XP/Reedy 3300kV Motor and ESC Combo 1/10th Scale	1
937	XP/Reedy 3900kV Motor and ESC Combo 1/10th Scale	1
938	XP/Reedy 4900kV Motor and ESC Combo 1/10th Scale	1
939	XP/Reedy 6100kV Motor and ESC Combo 1/10th Scale	1
0/0/		
9626	Reedy Radon 30,000 RPM	1
:: Re	eedy Batteries and Chargers	1
:: R e	AA Alkaline 1.5V (4)	1
302 303	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable	1 1 1
302 303 610	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger	
302 303 610 654	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F)	
302 303 610	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger	
302 303 610 654	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F)	1 1
302 303 610 654 681 682 683	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3000mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector	1 1 1 1
302 303 610 654 681 682	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3000mAh 7.2V w/DEANS® connector	1 1 1 1
302 303 610 654 681 682 683	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3000mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector	1 1 1 1 1 1
302 303 610 654 681 682 683 684	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3000mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 4200mAh 7.2V w/DEANS® connector	1 1 1 1 1 1 1
302 303 610 654 681 682 683 684 685	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3000mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 4200mAh 7.2V w/DEANS® connector LiPo 5000mAh 7.4V 40C+	1 1 1 1 1 1 1
302 303 610 654 681 682 683 684 685 686	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3000mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 4200mAh 7.2V w/DEANS® connector LiPo 5000mAh 7.4V 40C+ LiPo 4200mAh 7.4V 40C+ SP	1 1 1 1 1 1 1 1 1 1
302 303 610 654 681 682 683 684 685 686	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3000mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Ulipo 5000mAh 7.4V 40C + LiPo 4200mAh 7.4V 40C + SP R-Power 1700mAh 7.2V w/TAM connector	1 1 1 1 1 1 1 1 1
302 303 610 654 681 682 683 684 685 686 689 693	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3000mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 4200mAh 7.2V w/DEANS® connector LiPo 5000mAh 7.4V 40C + LiPo 4200mAh 7.4V 40C + SP R-Power 1700mAh 7.2V w/TAM connector Wolfpack 2400mAh 7.2V w/TAM connector	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
302 303 610 654 681 682 683 684 685 686 689 693 694	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3000mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 4200mAh 7.2V w/DEANS® connector LiPo 5000mAh 7.4V 40C+ LiPo 4200mAh 7.4V 40C+ SP R-Power 1700mAh 7.2V w/TAM connector Wolfpack 2400mAh 7.2V w/TAM connector Wolfpack 3000mAh 7.2V w/TAM connector	1 1 1 1 1 1 1 1 1 1
302 303 610 654 681 682 683 684 685 686 689 693 694	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3000mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 4200mAh 7.2V w/DEANS® connector LiPo 5000mAh 7.4V 40C+ LiPo 4200mAh 7.4V 40C+ SP R-Power 1700mAh 7.2V w/TAM connector Wolfpack 2400mAh 7.2V w/TAM connector Wolfpack 3000mAh 7.2V w/TAM connector Wolfpack 3600mAh 7.2V w/TAM connector	1 1 1 1 1 1 1 1 1 1 1
302 303 610 654 681 682 683 684 685 686 689 693 694 695 696	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3000mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 4200mAh 7.2V w/DEANS® connector LiPo 5000mAh 7.4V 40C+ LiPo 4200mAh 7.4V 40C + SP R-Power 1700mAh 7.2V w/TAM connector Wolfpack 2400mAh 7.2V w/TAM connector Wolfpack 3000mAh 7.2V w/TAM connector	1 1 1 1 1 1 1 1 1 1 1
302 303 610 654 681 682 683 684 685 686 689 693 694 695 696	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3000mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 4200mAh 7.2V w/DEANS® connector LiPo 5000mAh 7.4V 40C+ LiPo 4200mAh 7.4V 40C+ SP R-Power 1700mAh 7.2V w/TAM connector Wolfpack 2400mAh 7.2V w/TAM connector Wolfpack 3600mAh 7.2V w/TAM connector Wolfpack 3600mAh 7.2V w/TAM connector Wolfpack 3600mAh 7.2V w/TAM connector Wolfpack 3000mAh 7.2V w/TAM connector	
302 303 610 654 681 682 683 684 685 686 689 693 694 695 696 697 698	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 4200mAh 7.2V w/DEANS® connector LiPo 5000mAh 7.4V 40C + LiPo 4200mAh 7.4V 40C + SP R-Power 1700mAh 7.2V w/TAM connector Wolfpack 2400mAh 7.2V w/TAM connector Wolfpack 3600mAh 7.2V w/TRA connector	
302 303 610 654 681 682 683 684 685 686 689 693 694 695 696 697 698	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 4200mAh 7.2V w/DEANS® connector LiPo 5000mAh 7.4V 40C + LiPo 4200mAh 7.4V 40C + SP R-Power 1700mAh 7.2V w/TAM connector Wolfpack 2400mAh 7.2V w/TAM connector Wolfpack 3600mAh 7.2V w/TAM connector Wolfpack 3000mAh 7.2V w/TAM connector Wolfpack 3600mAh 7.2V w/TAM connector Wolfpack 3600mAh 7.2V w/TRA connector	
302 303 610 654 681 682 683 684 685 686 693 694 695 696 697 698 699 700 703	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 4200mAh 7.2V w/DEANS® connector LiPo 5000mAh 7.4V 40C+ LiPo 4200mAh 7.4V 40C + SP R-Power 1700mAh 7.2V w/TAM connector Wolfpack 2400mAh 7.2V w/TAM connector Wolfpack 3600mAh 7.2V w/TAM connector Wolfpack 4200mAh 7.2V w/TAM connector Wolfpack 4200mAh 7.2V w/TAM connector Under the transfer of the tra	
302 303 610 654 681 682 683 684 685 686 693 694 695 696 697 698 699 700 703 704	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 4200mAh 7.2V w/DEANS® connector LiPo 5000mAh 7.4V 40C+ LiPo 4200mAh 7.4V 40C+ LiPo 4200mAh 7.2V w/TAM connector Wolfpack 2400mAh 7.2V w/TAM connector Wolfpack 3600mAh 7.2V w/TRA connector Ulfpack 3600mAh 7.2V w/TRA connector Wolfpack 4200mAh 7.2V w/TRA connector Wolfpack 4200mAh 7.2V w/TRA connector	
302 303 610 654 681 682 683 684 685 686 689 693 694 695 696 697 698 699 700 703 704 709	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 4200mAh 7.2V w/DEANS® connector LiPo 5000mAh 7.4V 40C + LiPo 4200mAh 7.4V 40C + SP R-Power 1700mAh 7.2V w/TAM connector Wolfpack 2400mAh 7.2V w/TAM connector Wolfpack 3600mAh 7.2V w/TRA connector Ulfpack 3600mAh 7.2V w/TRA connector Wolfpack 3600mAh 7.2V w/TRA connector Ulfpack 3600mAh 7.2V w/TRA connector LiPo 5000mAh 7.4V 20C LiPo 5000mAh 7.4V 20C LiPo 5000mAh 7.4V 35C ROAR Spec	
302 303 610 654 681 682 683 684 685 686 689 693 694 695 696 697 698 699 700 703 704 709 711	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 4200mAh 7.2V w/DEANS® connector LiPo 5000mAh 7.4V 40C + LiPo 4200mAh 7.4V 40C + SP R-Power 1700mAh 7.2V w/TAM connector Wolfpack 2400mAh 7.2V w/TAM connector Wolfpack 3600mAh 7.2V w/TRA connector Ulfpack 3600mAh 7.2V w/TRA connector Ulfpack 3600mAh 7.2V w/TRA connector LiPo 5000mAh 7.4V 20C LiPo 5000mAh 7.4V 20C LiPo 5000mAh 7.4V 35C ROAR Spec LiPo 4900mAh 7.4V 35C EFRA Spec	
302 303 610 654 681 682 683 684 685 686 689 693 694 695 696 697 698 699 700 703 704 709	AA Alkaline 1.5V (4) AA 2700mAh NiMH 1.2V Rechargeable Reedy AC/DC 4-7 Cell NiMH/NiCd Charger 4.0mm Gold Connectors (2M, 2F) Wolfpack 2400mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 3600mAh 7.2V w/DEANS® connector Wolfpack 4200mAh 7.2V w/DEANS® connector LiPo 5000mAh 7.4V 40C + LiPo 4200mAh 7.4V 40C + SP R-Power 1700mAh 7.2V w/TAM connector Wolfpack 2400mAh 7.2V w/TAM connector Wolfpack 3600mAh 7.2V w/TRA connector Ulfpack 3600mAh 7.2V w/TRA connector Wolfpack 3600mAh 7.2V w/TRA connector Ulfpack 3600mAh 7.2V w/TRA connector LiPo 5000mAh 7.4V 20C LiPo 5000mAh 7.4V 20C LiPo 5000mAh 7.4V 35C ROAR Spec	

	ly Batteries and Chargers (cont.)	
723	LiFe 4000mAh 6.6V 30C	1
724	Wolfpack 3000mAh 8.4V w/DEANS® connector	1
725	Wolfpack 3600mAh 8.4V w/DEANS® connector	1
:: Reed	ly Accessories	
651	Battery Bars (8)	1
652	Battery Bars (30)	1
653	Battery Bars (100)	1
654	4.0mm plugs (2M, 2F)	- 1
655	4.0mm plugs (2M, 10F)	1
656	4.0mm plugs (10F)	1
657	4.0mm plugs (100F)	1
658	4.0mm plugs (10M)	1
659	4.0mm plugs (30M)	1
660	3.5mm plugs (3M, 3F)	1
661	3.5mm plugs (10F)	1
662	3.5mm plugs (100F)	1
663	3.5mm plugs (10M)	1
664	3.5mm plugs (30M)	1
665	Single Cell Shrink - Clear (12)	1
666	Single Cell Shrink - Clear (30)	1
667	Single Cell Shrink - Clear (100)	1
716	Reedy 09 Decal Set	1
718	LiPo Charging Sack	1

:: LKP S	Speed Controls	
LRP8320	Al Super Reverse	1
LRP8325	Al Pro Reverse	1
LRP8337	AI Bullet Reverse	1
LRP80100	AI Brushless Reverse	1
LRP80150	Al Brushless Pro Reverse	1
LRP80400	SPX Brushless Super Reverse	1
LRP80710	SPX Competition Stock Spec	1
LRP80800	V 8.1	1
LRP80830	Quantum Competition 3	1
LRP80900	SXX Competition Speed Control	1
LRP80910	SXX Stock-Spec	1
LRP80950	SXX TC-Spec Speed Control	1
LRP86500	NEXXT 4X esc	1
:: LRP I	Brushless Motors	
LRP50642	LRP X-12 9.5 Turn	1
LRP50652	LRP X-12 8.5 Turn	- 1
LRP50662	LRP X-12 7.5 Turn	1
LRP50672	LRP X-12 6.5 Turn	1
LRP50682	LRP X-12 5.5 Turn	1
LRP50687	LRP X-12 5.0 Turn	1
LRP50692	LRP X-12 4.5 Turn	1
LRP50702	LRP X-12 4.0 Turn	1
LRP50712	LRP X-12 3.5 Turn	1
LRP50722	LRP X-12 3.0 Turn	1
LRP50832	Vector X-12 Stock-Spec 10.5 Turn	1
LRP50842	Vector X-12 Stock Spec 13.5 Turn	1
		1
LRP50852	Vector X-12 Stock Spec 17.5 Turn	- 1

·· IDD I	Brushless Combo's	oo R	odies and Decals	
LRP80572	SPX / X-12 SS 10.5 Turn 1		SC10 Clear Body	1
LRP80573	SPX / X-12 SS 13.5 Turn 1		SC10 '09 Clear Body	1
LRP80574	SPX / X-12 SS 17.5 Turn 1		SC10 KMC Body, pre-painted & detailed	i
LRP80575	SPX / X-12 SS 21.5 Turn 1		SC10 Lucas Oil Body, pre-painted & detailed	1
LRP80585	Al Pro / X-11 Short Course Combo		SC10 Bully Dog Body, pre-painted & detailed	1
LRP80640	SXX TC / X-12 3.0 Turn		SC10 Pro Comp Body, pre-painted & detailed	1
LRP80641	SXX TC / X-12 3.5 Turn 1		SC10 AE Body, pre-painted & detailed	1
LRP80642	SXX TC / X-12 3.5 10111 1		SC10 KMC Decal Sheet	1
LRP80643	SXX TC / X-12 4.5 Turn 1		SC10 Lucas Oil Decal Sheet	1
LRP80644	SXX TC / X-12 4.5 10111 1		SC10 Bully Dog Decal Sheet	1
LRP80645	SXX TC / X-12 5.5 Turn 1		SC10 Pro Comp Decal Sheet	1
LRP80646	SXX TC / X-12 5.5 Turn 1		SC10 AE Decal Sheet	1
LRP80647	SXX TC / X-12 0.5 Turn 1		SC10 Ready Lift Body, pre-painted & detailed	1
LRP80648	SXX TC / X-12 7.5 Turn 1		SC10 Ready Lift Decal Sheet	1
LRP80649	SXX TC / X-12 0.5 Turn 1		SC10 Papas & Beer, pre-painted & detailed	1
LRP80654	SXX COMP / X-12 5.0 Turn 1		SC10 Papas & Beer Decal Sheet	1
LRP80655	SXX COMP / X-12 5.5 Turn 1		SC10 'O9 Lucas Oil Body, pre-painted & detailed	
LRP80656	SXX COMP / X-12 5.5 Turn 1		SC10 '09 Lucas Oil Decal Sheet	1
LRP80657	SXX COMP / X-12 0.5 Turn 1			1
LRP80658	SXX COMP / X-12 7.5 Turn 1		SC10 '09 Pro Comp Body, pre-painted & detailed SC10 '09 Pro Comp Decal Sheet	1
LRP80659	SXX COMP / X-12 0.5 Turn 1		SC10 '09 Speed Tech Body, pre-painted & detailed	1
LRP80673	SXX Stock-Spec / X-12 SS 10.5 turn 1		SC10 '09 Speed Tech Decal Sheet	1
LRP80674	SXX Stock-Spec / X-12 SS 10.5 turn 1		SC10 '09 Speed Tech Decar Sheet SC10 '09 Rockstar / Makita Body, pre-painted & detailed	1
LRP80675	SXX Stock-Spec / X-12 SS 17.5 turn 1		SC10 '09 Rockstar / Makita Decal Sheet	1
	•			
:: LRP /	X-12 Replacement Ball Bearings		/18 Kits and RTR's	1
LRP50621	X-12 Replacement build bearings X-12 Optional Ceramic Ball Bearings		RC18T RTR (ready-to-run) RC18T2 2.4ghz RTR (ready-to-run)	
LINI JUUL I	N-12 Opiioliui Cerulliic Duli Deurilius			
	•			ļ
LRP50622	X-12 Small parts Set	20103	RC18B2 - RC18T2 Team Kit	1
LRP50622 LRP50623	X-12 Small parts Set 1 X-12 PreciSensor Unit 1	20103 20105	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run)	1
LRP50622 LRP50623 LRP50624	X-12 Small parts Set 1 X-12 PreciSensor Unit 1 X-12 Replacement alum. Front can 1	20103 20105 20106	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run)	1 1 1
LRP50622 LRP50623 LRP50624 LRP50625	X-12 Small parts Set 1 X-12 PreciSensor Unit 1 X-12 Replacement alum. Front can 1 X-12 Lightweight Alum. Can 1	20103 20105 20106 20110	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18MT RTR (ready-to-run)	1 1 1 1 1
LRP50622 LRP50623 LRP50624 LRP50625 LRP50626	X-12 Small parts Set 1 X-12 PreciSensor Unit 1 X-12 Replacement alum. Front can 1 X-12 Lightweight Alum. Can 1 X-12 Alum Rear Cover 1	20103 20105 20106 20110 20115	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18MT RTR (ready-to-run) RC18R Kamino RTR (ready-to-run)	1 1 1 1 1 1
LRP50622 LRP50623 LRP50624 LRP50625 LRP50626 LRP50632	X-12 Small parts Set 1 X-12 PreciSensor Unit 1 X-12 Replacement alum. Front can 1 X-12 Lightweight Alum. Can 1 X-12 Alum Rear Cover 1 X-12 12.0mm sintered rotor 1	20103 20105 20106 20110 20115 20118	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18MT RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run)	1 1 1 1 1 1 1 1
LRP50622 LRP50623 LRP50624 LRP50625 LRP50626 LRP50632 LRP50633	X-12 Small parts Set 1 X-12 PreciSensor Unit 1 X-12 Replacement alum. Front can 1 X-12 Lightweight Alum. Can 1 X-12 Alum Rear Cover 1 X-12 12.0mm sintered rotor 1 X-12 12.5mm sintered rotor	20103 20105 20106 20110 20115 20118 20120	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18MT RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run)	
LRP50622 LRP50623 LRP50624 LRP50625 LRP50626 LRP50632 LRP50633 LRP50634	X-12 Small parts Set 1 X-12 PreciSensor Unit 1 X-12 Replacement alum. Front can 1 X-12 Lightweight Alum. Can 1 X-12 Alum Rear Cover 1 X-12 12.0mm sintered rotor 1 X-12 12.5mm sintered rotor 1 X-12 13.0mm sintered rotor 1	20103 20105 20106 20110 20115 20118 20120 20130	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18MT RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run) RC18LM RTR (ready-to-run)	1 1 1 1 1 1 1
LRP50622 LRP50623 LRP50624 LRP50625 LRP50626 LRP50632 LRP50633 LRP50634 LRP80135	X-12 Small parts Set 1 X-12 PreciSensor Unit 1 X-12 Replacement alum. Front can 1 X-12 Lightweight Alum. Can 1 X-12 Alum Rear Cover 1 X-12 12.0mm sintered rotor 1 X-12 13.0mm sintered rotor 1 BEC Stabilizing capacitor	20103 20105 20106 20110 20115 20118 20120 20130	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18MT RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run) RC18LM RTR (ready-to-run) RC18LM RTR (ready-to-run)	1 1 1 1 1 1 1
LRP50622 LRP50623 LRP50624 LRP50625 LRP50626 LRP50632 LRP50633 LRP50634 LRP80135 LRP82520	X-12 Small parts Set 1 X-12 PreciSensor Unit 1 X-12 Replacement alum. Front can 1 X-12 Lightweight Alum. Can 1 X-12 Alum Rear Cover 1 X-12 12.0mm sintered rotor 1 X-12 12.5mm sintered rotor 1 X-12 13.0mm sintered rotor 1 BEC Stabilizing capacitor 1 BRUSHLESS/BRUSHED COOLING SET	20103 20105 20106 20110 20115 20118 20120 20130	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18RK Ramino RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run) RC18LM RTR (ready-to-run) RC18LM RTR (ready-to-run) T12, 1/10 Kits and RTR's FT Nitro TC3 Kit	1 1 1 1 1 1 1
LRP50622 LRP50623 LRP50624 LRP50625 LRP50632 LRP50633 LRP50634 LRP80135 LRP82520 LRP82511	X-12 Small parts Set X-12 PreciSensor Unit X-12 Replacement alum. Front can X-12 Lightweight Alum. Can X-12 Alum Rear Cover X-12 12.0mm sintered rotor X-12 12.5mm sintered rotor 1 X-12 13.0mm sintered rotor 3 BEC Stabilizing capacitor BRUSHLESS/BRUSHED COOLING SET BRUSHLESS LOW PROFILE FAN	20103 20105 20106 20110 20115 20118 20120 20130 2033 2042	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18MT RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run) RC18LM RTR (ready-to-run) RC18LM RTR (ready-to-run) T2, 1/10 Kits and RTR's FT Nitro TC3 Kit Nitro TC3 RTR Plus (ready-to-run)	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
LRP50622 LRP50623 LRP50624 LRP50625 LRP50632 LRP50633 LRP50634 LRP80135 LRP82520 LRP82511 LRP819307	X-12 Small parts Set X-12 PreciSensor Unit X-12 Replacement alum. Front can X-12 Lightweight Alum. Can X-12 Alum Rear Cover X-12 12.0mm sintered rotor 1 X-12 12.5mm sintered rotor 1 X-12 13.0mm sintered rotor BEC Stabilizing capacitor BRUSHLESS/BRUSHED COOLING SET BRUSHLESS LOW PROFILE FAN 70mm High Flex Sensor Wire	20103 20105 20106 20110 20115 20118 20120 20130 20130 2033 2042 4019	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18MT RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run) RC18LM RTR (ready-to-run) RC18LM RTR (ready-to-run) FT Nitro TC3 Kit Nitro TC3 RTR Plus (ready-to-run) FT 12R5.1 Kit	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
LRP50622 LRP50623 LRP50624 LRP50625 LRP50632 LRP50633 LRP50634 LRP80135 LRP82520 LRP82511 LRP819307 LRP819310	X-12 Small parts Set X-12 PreciSensor Unit X-12 Replacement alum. Front can X-12 Lightweight Alum. Can 1 X-12 Alum Rear Cover X-12 12.0mm sintered rotor 1 X-12 12.5mm sintered rotor 1 X-12 13.0mm sintered rotor 1 BEC Stabilizing capacitor BRUSHLESS/BRUSHED COOLING SET BRUSHLESS LOW PROFILE FAN 70mm High Flex Sensor Wire 1 100mm High Flex Sensor Wire	20103 20105 20106 20110 20115 20118 20120 20130 33 2042 4019 7020	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18MT RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run) RC18LM RTR (ready-to-run) RC18LM RTR (ready-to-run) FT Nitro TC3 Kit Nitro TC3 RTR Plus (ready-to-run) FT 12R5.1 Kit RC10T4 Team Truck Kit	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
LRP50622 LRP50623 LRP50624 LRP50625 LRP50632 LRP50633 LRP50634 LRP80135 LRP82520 LRP82511 LRP819307 LRP819310 LRP819315	X-12 Small parts Set X-12 PreciSensor Unit X-12 Replacement alum. Front can X-12 Lightweight Alum. Can X-12 Alum Rear Cover 1 X-12 12.0mm sintered rotor 1 X-12 12.5mm sintered rotor 1 X-12 13.0mm sintered rotor 1 BEC Stabilizing capacitor BRUSHLESS/BRUSHED COOLING SET BRUSHLESS LOW PROFILE FAN 70mm High Flex Sensor Wire 1 100mm High Flex Sensor Wire 1 150mm High Flex Sensor Wire	20103 20105 20106 20110 20118 20120 20130 2033 2042 4019 7020 7022	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18RK Ramino RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run) RC18LM RTR (ready-to-run) RC18LM RTR (ready-to-run) FT Nitro TC3 Kit Nitro TC3 RTR Plus (ready-to-run) FT 12R5.1 Kit RC10T4 Team Truck Kit FT RC10T4 Team Truck Kit	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
LRP50622 LRP50623 LRP50624 LRP50625 LRP50632 LRP50633 LRP50634 LRP80135 LRP82520 LRP82511 LRP819307 LRP819310 LRP819315 LRP819320	X-12 Small parts Set X-12 PreciSensor Unit X-12 Replacement alum. Front can 1 X-12 Lightweight Alum. Can 1 X-12 Alum Rear Cover 1 X-12 12.0mm sintered rotor 1 X-12 12.5mm sintered rotor 1 X-12 13.0mm sintered rotor 1 BEC Stabilizing capacitor 1 BRUSHLESS/BRUSHED COOLING SET 1 BRUSHLESS LOW PROFILE FAN 1 70mm High Flex Sensor Wire 1 150mm High Flex Sensor Wire 1 200mm High Flex Sensor Wire	20103 20105 20106 20110 20115 20118 20120 20130 2033 2042 4019 7020 7022 7027	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18RT RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run) RC18LM RTR (ready-to-run) RC18LM RTR (ready-to-run) FT Nitro TC3 Kit Nitro TC3 RTR Plus (ready-to-run) FT 12R5.1 Kit RC10T4 Team Truck Kit FT RC10T4 Team Truck Kit SC10 2WD Short Course Race Truck Kit	
LRP50622 LRP50623 LRP50624 LRP50625 LRP50632 LRP50633 LRP50634 LRP80135 LRP82520 LRP82511 LRP819307 LRP819310 LRP819315 LRP819320	X-12 Small parts Set X-12 PreciSensor Unit X-12 Replacement alum. Front can 1 X-12 Lightweight Alum. Can 1 X-12 Alum Rear Cover 1 X-12 12.0mm sintered rotor 1 X-12 12.5mm sintered rotor 1 X-12 13.0mm sintered rotor 1 BEC Stabilizing capacitor 1 BRUSHLESS/BRUSHED COOLING SET 1 BRUSHLESS LOW PROFILE FAN 1 70mm High Flex Sensor Wire 1 100mm High Flex Sensor Wire 1 150mm High Flex Sensor Wire 1 200mm High Flex Sensor Wire 1 1 100mm High Flex Sensor Wire 1	20103 20105 20106 20110 20115 20118 20120 20130 2033 2042 4019 7020 7022 7027	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run) RC18LM RTR (ready-to-run) /12, 1/10 Kits and RTR's FT Nitro TC3 Kit Nitro TC3 RTR Plus (ready-to-run) FT 12R5.1 Kit RC10T4 Team Truck Kit FT RC10T4 Team Truck Kit SC10 2WD Short Course Race Truck Kit SC10 Associated/RC10.com Race Truck RTR (ready-to-run)	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
LRP50622 LRP50623 LRP50624 LRP50625 LRP50632 LRP50633 LRP50634 LRP80135 LRP82520 LRP82511 LRP819307 LRP819310 LRP819315 LRP819320 *** LRP	X-12 Small parts Set X-12 PreciSensor Unit X-12 Replacement alum. Front can 1 X-12 Lightweight Alum. Can 1 X-12 Alum Rear Cover 1 X-12 12.0mm sintered rotor 1 X-12 12.5mm sintered rotor 1 X-12 13.0mm sintered rotor 1 BEC Stabilizing capacitor 1 BRUSHLESS/BRUSHED COOLING SET 1 BRUSHLESS LOW PROFILE FAN 1 70mm High Flex Sensor Wire 1 100mm High Flex Sensor Wire 1 150mm High Flex Sensor Wire 1 200mm High Flex Sensor Wire 1 1 Thargers, Power Supply, Balancer, Iron Pulsar Competition 3 Charger	20103 20105 20106 20110 20115 20118 20120 20130 33 2042 4019 7020 7022 7027 7029 7030	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18RMT RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run) RC18LM RTR (ready-to-run) RC18LM RTR (ready-to-run) FT Nitro TC3 Kit Nitro TC3 RTR Plus (ready-to-run) FT 12R5.1 Kit RC10T4 Team Truck Kit FT RC10T4 Team Truck Kit SC10 2WD Short Course Race Truck Kit SC10 Associated/RC10.com Race Truck RTR (ready-to-run) SC10 KMC Wheels Race Truck RTR (ready-to-run)	
LRP50622 LRP50623 LRP50624 LRP50625 LRP50632 LRP50633 LRP50634 LRP80135 LRP82520 LRP82511 LRP819307 LRP819310 LRP819315 LRP819320 ** LRP	X-12 Small parts Set X-12 PreciSensor Unit X-12 Replacement alum. Front can 1 X-12 Lightweight Alum. Can 1 X-12 Lightweight Alum. Can 1 X-12 Alum Rear Cover 1 X-12 12.0mm sintered rotor 1 X-12 12.5mm sintered rotor 1 X-12 13.0mm sintered rotor 1 BEC Stabilizing capacitor 1 BRUSHLESS/BRUSHED COOLING SET 1 BRUSHLESS LOW PROFILE FAN 1 70mm High Flex Sensor Wire 1 100mm High Flex Sensor Wire 1 150mm High Flex Sensor Wire 1 200mm High Flex Sensor Wire 1 1 Tomm High Flex Sensor Wire	20103 20105 20106 20110 20118 20120 20130 2033 2042 4019 7020 7022 7027 7029 7030 7032	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run) RC18LM RTR (ready-to-run) //12, 1/10 Kits and RTR's FT Nitro TC3 Kit Nitro TC3 RTR Plus (ready-to-run) FT 12R5.1 Kit RC10T4 Team Truck Kit FT RC10T4 Team Truck Kit SC10 2WD Short Course Race Truck Kit SC10 Associated/RC10.com Race Truck RTR (ready-to-run) SC10 KMC Wheels Race Truck RTR (ready-to-run) SC10 Ready Lift RTR (ready-to-run)	
LRP50622 LRP50623 LRP50624 LRP50625 LRP50632 LRP50633 LRP50634 LRP80135 LRP82520 LRP82511 LRP819307 LRP819310 LRP819310 LRP819310 LRP819320 ** LRP LRP41552 LRP43150 LRP45200	X-12 Small parts Set X-12 PreciSensor Unit X-12 Replacement alum. Front can 1 X-12 Lightweight Alum. Can 1 X-12 Lightweight Alum. Can 1 X-12 Alum Rear Cover 1 X-12 12.0mm sintered rotor 1 X-12 12.5mm sintered rotor 1 X-12 13.0mm sintered rotor 1 BEC Stabilizing capacitor 1 BRUSHLESS/BRUSHED COOLING SET 1 BRUSHLESS LOW PROFILE FAN 1 70mm High Flex Sensor Wire 1 100mm High Flex Sensor Wire 1 150mm High Flex Sensor Wire 1 150mm High Flex Sensor Wire 1 1 150mm High Flex Sensor Wire 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	20103 20105 20106 20110 20115 20118 20120 20130 2033 2042 4019 7020 7022 7027 7029 7030 7032 7036	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18MT RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run) RC18LM RTR (ready-to-run) /12, 1/10 Kfts and RTR's FT Nitro TC3 Kit Nitro TC3 RTR Plus (ready-to-run) FT 12R5.1 Kit RC10T4 Team Truck Kit FT RC10T4 Team Truck Kit SC10 2WD Short Course Race Truck Kit SC10 Associated/RC10.com Race Truck RTR (ready-to-run) SC10 KMC Wheels Race Truck RTR (ready-to-run) RC10T4.1 RTR 2.4GHz Brushed (ready-to-run)	
LRP50622 LRP50623 LRP50624 LRP50625 LRP50626 LRP50632 LRP50633 LRP50634 LRP80135 LRP82520 LRP82511 LRP819307 LRP819310 LRP819315 LRP819320 *** LRP LRP41552 LRP43150 LRP45200 LRP65800	X-12 Small parts Set X-12 PreciSensor Unit X-12 Replacement alum. Front can 1 X-12 Lightweight Alum. Can 1 X-12 Lightweight Alum. Can 1 X-12 Alum Rear Cover 1 X-12 12.0mm sintered rotor 1 X-12 12.5mm sintered rotor 1 X-12 13.0mm sintered rotor 1 BEC Stabilizing capacitor 1 BRUSHLESS/BRUSHED COOLING SET 1 BRUSHLESS LOW PROFILE FAN 1 70mm High Flex Sensor Wire 1 100mm High Flex Sensor Wire 1 150mm High Flex Sensor Wire 1 150mm High Flex Sensor Wire 1 1 Somm High Flex Sensor Wire 1 1 Somm High Flex Sensor Wire 1 1 Somm High Flex Sensor Wire 1 1 Lipo Parallel Balancer 1 High Power Solder Station 1 1	20103 20105 20106 20110 20115 20118 20120 20130 2042 4019 7020 7022 7027 7029 7030 7032 7036 7037	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run) RC18LM RTR (ready-to-run) /12, 1/10 Kits and RTR's FT Nitro TC3 Kit Nitro TC3 RTR Plus (ready-to-run) FT 12R5.1 Kit RC10T4 Team Truck Kit FT RC10T4 Team Truck Kit SC10 2WD Short Course Race Truck Kit SC10 Associated/RC10.com Race Truck RTR (ready-to-run) SC10 KMC Wheels Race Truck RTR (ready-to-run) RC10T4.1 RTR 2.4GHz Brushed (ready-to-run) RC10T4.1 RTR 2.4GHz Brushless (ready-to-run)	
LRP50622 LRP50623 LRP50624 LRP50625 LRP50632 LRP50633 LRP50634 LRP80135 LRP82520 LRP82511 LRP819307 LRP819310 LRP819315 LRP819320 *** LRP LRP41552 LRP45200 LRP45200 LRP65800 LRP65802	X-12 Small parts Set X-12 PreciSensor Unit X-12 Replacement alum. Front can 1 X-12 Lightweight Alum. Can 1 X-12 Lightweight Alum. Can 1 X-12 Alum Rear Cover 1 X-12 12.0mm sintered rotor 1 X-12 12.5mm sintered rotor 1 X-12 13.0mm sintered rotor 1 BEC Stabilizing capacitor 1 BRUSHLESS/BRUSHED COOLING SET 1 BRUSHLESS LOW PROFILE FAN 1 70mm High Flex Sensor Wire 1 100mm High Flex Sensor Wire 1 150mm High Flex Sensor Wire 1 200mm High Flex Sensor Wire 1 1 Tomm High Flex Sensor Wire 1 Tompers, Power Supply, Balancer, Iron 1 Pulsar Competition 3 Charger 1 Power Supply Competition 1 LiPo Parallel Balancer 1 High Power Solder Station 1 Soldering Tip 5mm	20103 20105 20106 20110 20115 20118 20120 20130 33 2042 4019 7020 7022 7027 7029 7030 7032 7036 7037 7040	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18RK Kamino RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run) RC18LM RTR (ready-to-run) RC18LM RTR (ready-to-run) /12, 1/10 Kits and RTR's FT Nitro TC3 Kit Nitro TC3 RTR Plus (ready-to-run) FT 12R5.1 Kit RC10T4 Team Truck Kit FT RC10T4 Team Truck Kit SC10 2WD Short Course Race Truck Kit SC10 Associated/RC10.com Race Truck RTR (ready-to-run) SC10 KMC Wheels Race Truck RTR (ready-to-run) RC10T4.1 RTR 2.4GHz Brushless (ready-to-run) RC10T4.1 RTR 2.4GHz Brushless (ready-to-run) SC10 RTR, 2.4ghz Brushless (ready-to-run)	
LRP50622 LRP50623 LRP50624 LRP50625 LRP50632 LRP50633 LRP50634 LRP80135 LRP82520 LRP82511 LRP819307 LRP819310 LRP819315 LRP819320 ** LRP LRP41552 LRP41552 LRP45200 LRP65800 LRP65802 LRP65803	X-12 Small parts Set X-12 PreciSensor Unit X-12 Replacement alum. Front can 1 X-12 Lightweight Alum. Can 1 X-12 Lightweight Alum. Can 1 X-12 Alum Rear Cover 1 X-12 12.0mm sintered rotor 1 X-12 12.5mm sintered rotor 1 X-12 13.0mm sintered rotor 1 BEC Stabilizing capacitor 1 BRUSHLESS/BRUSHED COOLING SET 1 BRUSHLESS LOW PROFILE FAN 1 70mm High Flex Sensor Wire 1 100mm High Flex Sensor Wire 1 150mm High Flex Sensor Wire 1 200mm High Flex Sensor Wire 1 1 Tomm High Flex Sensor Wire 1 Tomm High Flex Sensor Wir	20103 20105 20106 20110 20118 20120 20130 2033 2042 4019 7020 7022 7027 7029 7030 7032 7036 7037 7040 7041	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18RK Kamino RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run) RC18LM RTR (ready-to-run) RC18LM RTR (ready-to-run) // 12, 1/10 Kits and RTR/s FT Nitro TC3 Kit Nitro TC3 RTR Plus (ready-to-run) FT 12R5.1 Kit RC10T4 Team Truck Kit FT RC10T4 Team Truck Kit SC10 2WD Short Course Race Truck Kit SC10 Associated/RC10.com Race Truck RTR (ready-to-run) SC10 KMC Wheels Race Truck RTR (ready-to-run) RC10T4.1 RTR 2.4GHz Brushless (ready-to-run) RC10T4.1 RTR 2.4GHz Brushless (ready-to-run) SC10 RTR, 2.4ghz Brushless Speed Tech / Bully Dog Body	
LRP50622 LRP50623 LRP50624 LRP50625 LRP50632 LRP50633 LRP50634 LRP80135 LRP82520 LRP82511 LRP819307 LRP819310 LRP819315 LRP819320 *** LRP LRP41552 LRP45200 LRP45200 LRP65800 LRP65802	X-12 Small parts Set X-12 PreciSensor Unit X-12 Replacement alum. Front can 1 X-12 Lightweight Alum. Can 1 X-12 Lightweight Alum. Can 1 X-12 Alum Rear Cover 1 X-12 12.0mm sintered rotor 1 X-12 12.5mm sintered rotor 1 X-12 13.0mm sintered rotor 1 BEC Stabilizing capacitor 1 BRUSHLESS/BRUSHED COOLING SET 1 BRUSHLESS LOW PROFILE FAN 1 70mm High Flex Sensor Wire 1 100mm High Flex Sensor Wire 1 150mm High Flex Sensor Wire 1 200mm High Flex Sensor Wire 1 1 Tomm High Flex Sensor Wire 1 Tompers, Power Supply, Balancer, Iron 1 Pulsar Competition 3 Charger 1 Power Supply Competition 1 LiPo Parallel Balancer 1 High Power Solder Station 1 Soldering Tip 5mm	20103 20105 20106 20110 20115 20118 20120 20130 2033 2042 4019 7020 7022 7027 7029 7030 7032 7036 7037 7040 7041 7043	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18RK Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run) RC18LM RTR (ready-to-run) /12, 1/10 Kits and RTR's FT Nitro TC3 Kit Nitro TC3 RTR Plus (ready-to-run) FT 12R5.1 Kit RC10T4 Team Truck Kit FT RC10T4 Team Truck Kit SC10 2WD Short Course Race Truck Kit SC10 Associated/RC10.com Race Truck RTR (ready-to-run) SC10 KMC Wheels Race Truck RTR (ready-to-run) RC10T4.1 RTR 2.4GHz Brushed (ready-to-run) RC10T4.1 RTR 2.4ghz Brushless (ready-to-run) SC10 RTR, 2.4ghz Brushless Lucas Oil Body SC10 RTR, 2.4ghz Brushless Speed Tech / Bully Dog Body SC10 RTR, 2.4ghz Brushless Pro Comp Body	
LRP50622 LRP50623 LRP50624 LRP50625 LRP50632 LRP50633 LRP50634 LRP80135 LRP82520 LRP82511 LRP819307 LRP819310 LRP819315 LRP819320 ** LRP LRP41552 LRP41552 LRP45200 LRP65800 LRP65802 LRP65803	X-12 Small parts Set X-12 PreciSensor Unit X-12 Replacement alum. Front can 1 X-12 Lightweight Alum. Can 1 X-12 Lightweight Alum. Can 1 X-12 Alum Rear Cover 1 X-12 12.0mm sintered rotor 1 X-12 12.5mm sintered rotor 1 X-12 13.0mm sintered rotor 1 BEC Stabilizing capacitor 1 BRUSHLESS/BRUSHED COOLING SET 1 BRUSHLESS LOW PROFILE FAN 1 70mm High Flex Sensor Wire 1 100mm High Flex Sensor Wire 1 150mm High Flex Sensor Wire 1 200mm High Flex Sensor Wire 1 1 Tomm High Flex Sensor Wire 1 Tomm High Flex Sensor Wir	20103 20105 20106 20110 20115 20118 20120 20130 33 2042 4019 7020 7022 7027 7029 7030 7032 7036 7037 7040 7041 7043 7044	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run) RC18LM RTR (ready-to-run) RC18LM RTR (ready-to-run) /12, 1/10 Kits and RTR's FT Nitro TC3 Kit Nitro TC3 RTR Plus (ready-to-run) FT 12R5.1 Kit RC10T4 Team Truck Kit FT RC10T4 Team Truck Kit SC10 2WD Short Course Race Truck Kit SC10 Associated/RC10.com Race Truck RTR (ready-to-run) SC10 KMC Wheels Race Truck RTR (ready-to-run) RC10T4.1 RTR 2.4GHz Brushed (ready-to-run) RC10T4.1 RTR 2.4GHz Brushless (ready-to-run) SC10 RTR, 2.4ghz Brushless Lucas Oil Body SC10 RTR, 2.4ghz Brushless Pro Comp Body SC10 RTR, 2.4ghz Brushless Pro Comp Body SC10 RTR, 2.4ghz Brushless Rockstar Body	
LRP50622 LRP50623 LRP50624 LRP50625 LRP50632 LRP50633 LRP50634 LRP80135 LRP82520 LRP82511 LRP819307 LRP819310 LRP819315 LRP819320 ** LRP LRP41552 LRP41552 LRP45200 LRP65800 LRP65802 LRP65803	X-12 Small parts Set X-12 PreciSensor Unit X-12 Replacement alum. Front can 1 X-12 Lightweight Alum. Can 1 X-12 Lightweight Alum. Can 1 X-12 Alum Rear Cover 1 X-12 12.0mm sintered rotor 1 X-12 12.5mm sintered rotor 1 X-12 13.0mm sintered rotor 1 BEC Stabilizing capacitor 1 BRUSHLESS/BRUSHED COOLING SET 1 BRUSHLESS LOW PROFILE FAN 1 70mm High Flex Sensor Wire 1 100mm High Flex Sensor Wire 1 150mm High Flex Sensor Wire 1 200mm High Flex Sensor Wire 1 1 Tomm High Flex Sensor Wire 1 Tomm High Flex Sensor Wir	20103 20105 20106 20110 20115 20118 20120 20130 2033 2042 4019 7020 7022 7027 7029 7030 7032 7036 7037 7040 7041 7043	RC18B2 - RC18T2 Team Kit RC18B RTR (ready-to-run) RC18B2 2.4ghz RTR (ready-to-run) RC18RK Kamino RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) RC18R Niteline RTR (ready-to-run) SC18 RTR (ready-to-run) RC18LM RTR (ready-to-run) /12, 1/10 Kits and RTR's FT Nitro TC3 Kit Nitro TC3 RTR Plus (ready-to-run) FT 12R5.1 Kit RC10T4 Team Truck Kit FT RC10T4 Team Truck Kit SC10 2WD Short Course Race Truck Kit SC10 Associated/RC10.com Race Truck RTR (ready-to-run) SC10 KMC Wheels Race Truck RTR (ready-to-run) RC10T4.1 RTR 2.4GHz Brushed (ready-to-run) RC10T4.1 RTR 2.4ghz Brushless (ready-to-run) SC10 RTR, 2.4ghz Brushless Lucas Oil Body SC10 RTR, 2.4ghz Brushless Speed Tech / Bully Dog Body SC10 RTR, 2.4ghz Brushless Pro Comp Body	

:: 1/1.	2, 1/10 Kits and RTR's (cont.)	
8020	FT RC10R5 Kit	1
8021	FT RC10R5-0VAL Kit	1
9034	RC10B4 Buggy Kit	1
	FT RC10B4 Buggy Kit	1
	RC10B4.1 RTR 2.4GHz Brushed (ready-to-run)	1
	RC10B4.1 RTR 2.4GHz Brushless (ready-to-run)	1
	FT B44 4WD Buggy Kit	i
	MGT 3.0 Nitro Monster Truck RTR (ready-to-run)	i
	FT TC5R Rubber Tire Edition 4WD Touring Car Kit	i
	TC4 4WD Touring Car RTR (ready-to-run)	i
	Kits and RTR's	
20503	Limited Edition MGT 4.60 Nitro RTR, with flag body (ready-to-run	
20504	Limited Edition MGT 8.0 Nitro RTR, with flag body (ready-to-run)	
80901	RC8e 4WD Electric Buggy Kit	1
80901-25	. ,	1
80901-28		1
80902	FT RC8B Nitro Buggy Kit	1
80904	FT RC8Be Electric Buggy Kit	1
80905	RC8RS "Race Spec" Nitro Buggy RTR (ready-to-run)	1
80911	RC8Te 4WD Electric Tuggy Kit	1
80911-25		1
80911-28	· · · ·	1
80912	RC8T Championship Edition	1
80915	RC8T-RS "Race Spec" Nitro Truggy RTR (ready-to-run)	1
80920	SC8 Short Course Race Truck, Red Bull Nitro RTR (ready-to-run)	1
80921	SC8 Short Course Race Truck, Lucas Oil Nitro RTR (ready-to-run)	1
80922	SC8 Short Course Race Truck, KMC Wheels Nitro RTR (ready-to-ru	n) 1
80923	SC8 Short Course Race Truck, Bully Dog Nitro RTR (ready-to-run)	1
80924	SC8 Short Course Race Truck, AE Team Nitro RTR (ready-to-run)	1
80925	SC8 Short Course Race Truck, Pro Comp Nitro RTR (ready-to-run)	1
80931	SC8e 4WD Electric Short Course Race Truck, Kit	1
80931-25	SC8e / SPX8 / Vector 8 2500Kv Combo	1
80931-28	SC8e / SPX8 / Vector 8 2800Kv Combo	1
Check o RTRs,	ut www.TeamAssociated.com - www.RC10.com for the latest ki and option parts for your SC10 and other Associated vehicles	ts, !
<u>։։ App</u>		
SP35**	Reedy 09' White T-Shirt (M, L, XL, XXL, XXXL)	1
SP36**	Reedy 09' Black T-Shirt (M, L, XL, XXL, XXXL)	1
SP58**	AE Logo Black T-Shirt (M, L, XL, XXL)	1
SP59**	AE Logo Blue T-Shirt (M, L, XL, XXL)	1
SP60**	AE Hooded Sweatshirt (S, M, L, XL, XXL)	1
SP61**	AE Vertigo Hooded Sweatshirt (S, M, L, XL, XXL)	1
SP62**	AE Vertigo Long Sleve T-Shirt (S, M, L, XL, XXL)	1
SP63**	AE Vertigo White T-Shirt (S, M, L, XL, XXL)	1
SP64**	AE Vertigo Blue T-Shirt (S, M, L, XL, XXL)	1
SP65**	AE Vertigo Black T-Shirt (S, M, L, XL, XXL)	i
SP100	1/8 Inner and Outer Boxes Only, Set	i
SP101	1/8 Inner Boxes Only, Set	ı l
SP102	1/10 Inner and Outer Boxes Only, Set	i
SP103	1/10 Inner Boxes Only, Set	i
SP410**	AE Hats Black (S-M, L-XL, XXL-XXXL)	i
SP415	1/8 Car Carrier Bag Only	i
CITIC	170 car carnor bag only	1

:: Too	ls	
SP416	1/10 Car Carrier Bag Only	1
	1/10 FT Motor Bag	1
SP418	1/10 FT Car Carrier Bag with Boxes, Set	1
SP420**	AE Pit Gloves (M, L, XL)	Pr.
715	Reedy 2009 Track Banner	1
110684	Team Associated Track Banner	1
,	** Use part number plus the desired size when ordering!	

			_
:: To	ols		
1111	FT Turnbuckle Wrench	1	
1449	Offroad Ride Height Gauge	1	
1450	FT Ride Height Gauge	1	,
1541	FT Hex Driver Set, (7 pcs)	1	11
1542	FT .050" Silver Hex Driver	1	4
1543	FT 1/16" Black Hex Driver	1	
1544	FT 1.5mm Purple Hex Driver	1	ŕ
1545	FT 5/64" Blue Hex Driver	1	,
1546	FT 3/32" Gold Hex Driver	1	
1547	FT 2.5mm Green Hex Driver	1	
1548	FT 3mm Red Hex Driver	1	
1551	FT Screwdriver Set	1	
1553	FT Phillips Silver Screwdriver	1	
1554	FT Silver Spring Hook Tool	1	
1561	FT Nut Driver Set, (6 pcs)	1	
1562	FT 3/16" Black Nut Driver	1	1
1563	FT 1/4" Red Nut Driver	1	
1564	FT 5.5mm Red Nut Driver	1	
1565	FT 11/32" Green Nut Driver	1	
1566	FT 7.7mm Silver Nut Driver	1	
1567	FT 8mm Gold Nut Driver	1	
1589	FT 5/64" Blue Ball Hex Driver	1	
1590	FT 3/32" Gold Ball Hex Driver	1	
1592	FT Ball Hex Driver Set, (3 pcs)	1	
1719	FT Camber $+$ Track Width Tool	1	
1737	FT Body Scissors	1	
3718	12 Inch Nylon Wire Ties	12	
3719	6 Inch Nylon Wire Ties	12	
3720	8 Inch Nylon Wire Ties	12	
3987	FT Droop Gauge	1	
6429	Shock Building Tool	1	
6956	Molded Tools, Set	1	
7709	4 Inch Nylon Wire Ties	12	
I			

Associated Electrics, Inc. 26021 Commercentre Drive Lake Forest, CA 92630-8853

call: (949) 544-7500 - fax: (949) 544-7501 Check out the following web sites for all of our electric kits, current products, new releases, setup help, tips, and racing info! www.TeamAssociated.com. - www.RC10.com

:: Adjustments / Tips

Motor Gearing:

Proper motor gearing will result in maximum performance and run time while reducing the chance of overheating and premature motor failure. The gear ratio chart lists recommended starting gear ratios for the most widely used motor types. Gear ratios will vary depending upon track conditions, driving style, and personal preference. Generally, you should not increase the pinion gear size more than one tooth greater than the starting size.

SC10 Gear Ratio Chart			
MOTOR	Pinion	Spur	FDR
27T Stock Motor	19	87	11.91:1
19T Super Stock Motor	19	87	11.91:1
17T Modified Motor	24	87	9,43:1
15T Modified Motor	22	87	10.28:1
14T Modified Motor	21	87	10.77 :1
17,5 Brushless Motor	28	75	6,96:1
13.5 Brushless Motor	26	75	7.50 :1
10.5 Brushless Motor	24	87	9.42:1
3300kV Brushless Motor	18	87	12,57 :1



Set The Gear Mesh

You should be able to rock the spur gear back and forth in the teeth of the pinion gear without making the pinion gear move. If the spur gear mesh is tight, then loosen the #31531 screws and move the motor away, then try again. A gear mesh that is too tight or too loose will reduce power and damage the gear teeth.

MAINTENANCE

Check For Fit

Periodically check all moving suspension parts. Suspension components must be kept clean and move freely without binding to prevent poor and / or inconsistent handling.

Motor Maintenance

Brushed motors require frequent maintenance to keep performance levels at their maximum. Between runs and after letting the motor cool completely, inspect the brushes to ensure that they are moving freely in their holders. Remove the springs and slide the brushes in and out of their holders checking for any resistance or rough spots. If found, remove the brush and carefully wipe it clean. Removing buildup will allow the brush to slide freely and create maximum contact with the commutator resulting in maximum power output.

After every 3-5 runs, remove the brushes from their holders and inspect the tips for wear or burning. If there is noticeable wear (less than 75% of the brush remaining), replace the brush with a new pair. If the tips become a burned blue color, the lubricant in the brush has been burned away and new brushes should be installed.

Occasionally, the motor should be cleaned with a soft brush to prevent dirt build up around the brush hood area and ball bearings. At this time, it is a good idea to add one drop of bushing / bearing oil to each bushing or ball bearing.

If using a brushless motor, please refer to the motor manufacturer's guidelines for proper maintenance.

Slipper Clutch

The assembly instructions give you a base setting for your clutch. Turn the nut on the shaft so that the end of the top shaft is even with the outside of the nut. Tighten the nut 3 more turns. At the track, tighten or loosen the nut in 1/8 turn increments until you hear a faint slipping sound for 1-2 feet on takeoffs.

Another popular way to set the clutch is to hold both rear tires firmly in place and apply short bursts of throttle. If the clutch is properly set, the front tires should lift slightly up off the surface.

:: Adjustments / Tips

Front Camber Links

Changing the length of the camber link is considered a bigger step than adjusting the ball end height on the tower. Shortening the camber link (or lowering the ball end) will give the front end less roll and quicken steering response. Lengthening the camber link (or raising the ball end) will give the front more roll and slower steering response.

Longer camber links are typically used on high grip tracks and shorter links tend to work better on medium-grip loose tracks.



Raise or lower the ball end by adding or subtracting washers here

Caster

Caster describes the angle of the kingpin as it leans toward the rear of the vehicle. Positive caster means the kingpin leans rearward at the top. The supplied 30° caster blocks (#7922) are recommended in most cases. For less corner entry steering and more exit steering, try the optional 25° blocks (#7919).

Front Camber

Camber describes the angle at which the tire and wheel rides when looked at from the front. Negative camber means that the tire leans inward at the top.

A good starting camber setting is -1°. Use the included #1719 camber gauge to set your camber. Positive camber, where the top of the tire is leaning out, is not recommended.

Rear Camber Link

Changing the length of the camber link is considered a bigger step than adjusting the ball end height on the rear chassis brace. Shortening the camber link (or lowering the ball end) will give the rear end less roll and the car will tend to accelerate or "square up" better. Lengthening the camber link (or raising the ball end) will give the rear more roll and more cornering grip. Longer camber links are typically used on high grip tracks, while shorter links tend to work better on med-grip loose tracks. The kit setting is the best compromise of cornering grip and acceleration.



^ Testing camber with camber gauge

Raise or lower the ball end by adding or subtracting washers here

Rear Camber

Camber describes the angle at which the tire and wheel rides when looked at from the back. Negative camber means that the tire leans inward at the top. A good starting camber setting is -1°. Use the included #1719 camber gauge to set your camber. Adding a small amount of positive camber, where the top of the tire is leaning out, will tend to improve straight-line acceleration on loose tracks.

Ride Height

Ride height is the distance from the ground to the bottom of the chassis.


The standard front ride height setting is with the front arms level

(reffered to as "arms level"). Check the ride height by lifting up the entire car about 8-12 inches off the bench and drop it. After the suspension "settles" into place, add or remove pre-load clips so that the left & right arms appear to be level.



*Front arms should be in a straight line when ride height is set at "arms level"

The rear ride height setting you should use most often is with the outdrive, driveshaft, and axles all on the same imaginary horizontal line (reffered to as "bones level"). Check the ride height by lifting up the entire car about 8-12 inches off the bench and drop it. After the suspension "settles" into place, add or remove pre-load clips so that the left & right driveshafts appear to be level.



Dogbones should be in a straight line when ride height is set at "dogbones level"

Wheelbase Adjustment

You have three options for rear hub spacing, Forward, Middle, & Back. The kit setting provides the most rear traction, and will be used most often. A short wheelbase will make the rear end more responsive.



Spacers to the rear will place hubs forward, shortening the wheelbase

Anti-Roll bar

The optional #9635 rear anti-roll bar kit (also called the "swaybar") allows you to add roll resistance to the rear end with minimal effect on handling over bumps and jumps. It is an especially helpful tuning item on high-grip tracks (try the gold bar). The silver and black anti-roll bars are typically used on medium-grip loose tracks.


:: Notes:	
l	J




::	Driver:	SC10 2.4g Standard Setup	:: Date:
	Track: _		
••	Fvent.		

Setup S	heet for	Team /	Associated	's	SC1	0

Rev. 2

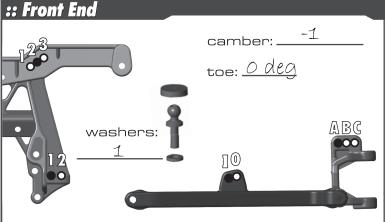

ride height: <u>Arms level</u>



-axle height caster 20°

middle \square down

25° 30°

:: Rear End



rear hub carriers

std O° 0.5° 1° 1.5° П

bones level ride height: _



wheel base long

medium short

anti-roll bar none

black (soft) silver (med) gold (hard)

:: Front Shocks

piston: _ limiter: 5 thin shock oil: 30Wt

:: Rear Shocks

radio: XP2

throttle / brake epa: __

throttle / brake expo : _

spring: Green piston:_ shock oil: <u>30</u>Wt limiter: 2 thin

:: Electronics

motor & wind: Reedy 540R 3300 RV BL pinion: 18 spur gear: 87

batteries: not included battery placement: back, cut foam block

servo:_ _ steering expo:_ :: Gear Differential / Ball Differential

initial brake:_____ drag brake:_

esc: XP SC450 BL throttle profile:_

gear diff fluid: Dlack, arease ball diff settings:□_

notes:_ :: Front Tires

body: SC10 09'

:: Other

tire: standard compound: Standard insert: Standard wheel: KMC - Black.

:: Rear Tires

tire: standard compound: standard insert: Standara wheel: KMC - Black

:: Race and Vehicle Comments

qualify: _____ finish: ____ tq: _ comments: ___

:: Track Info


smooth: □ bumpy: □ blue groove: □ traction: Dhigh Dmed. Dlow soft dirt: ☐ grass: ☐ clay: ☐ wet: ☐ dusty: other:

:: For more setups, visit www.RC10.com and click on 'Racing'

:: Hardware - 1:1


socket head (shcs)			
	4-40 × 1/4 (6285)		
	4-40×3/8 (6924)		
	4-40 × 1/2 (6925)		
	4-40×5/8 (6926)		
	4-40×3/4 (6927)		
	4-40×7/8 (7738)		
	4-40×1 (6928)		
4-40×1 1/4 (6913)			
	4-40 x 1 3/4 (9833)		
	5-40×7/16 (9643)		
	5-40×9/16 (9644)		
	5-40 X 3/4 (9835)		


setscrews	
	4-40 x 1/2 (9170)
	5-40 x 1/8 (3862)



flat head (fhcs)	
	2.5x6mm (4675)
	4-40×3/8 (6292)
	4-40 × 1/2 (6922)
	4-40 x 5/8 (6915)
	5-40 x 1/2 (9269)







0(=	silver .200" (6276)
=	silver .300" (6277)
nuts (lock	c/plain]
0	4-40 small plain nut (7260)
() 3/16	aluminum locking nut (4449)
	shock mount nut (6472)
	4-40 nut (6295)
	5-40 lock nut (6629)
B-	32 aluminum lock nut (9834)

Servo Chart 1 FIND YOUR	STEERING SERVO TYPE (Steering servo is sold separately) NOT ALL SERVOS ARE LISTED	2 #7336 \$	#9180 SERVO ARM
SERVO TYPE	Associated Electrics / XP AE SHV1504MG, DS1015, DS1313	thin spacer	F
	Airtronics 94102	no spacer	A
60 B	Airtronics 94738, 94157, 94158, 94257, 94258, 94357, 94358, 94452, 94453, 94751, 94755	thick spacer	А
FIND YOUR	Hitec HS-5625MG, HS-5645MG, HS-625MG, HS-645MG	no spacer	н
SPACER(S)	Hitec HS-303, HS-300BB, HS-945MG, HS-925MG, HS-5945MG, HS-5925MG, HS-525MG, HS-525BB, HS-425BB, HS-422	thin spacer	н
00	JR Z4725, Z4750, Z2750, Z8450, Z8550, NES-4750	no spacer	J
33	JR Z250, Z550	thin spacer	J
SELECT YOUR	Futaba S9204, S9250, S9450, S148	no spacer	F
SERVO HORN	Futaba \$3003, \$9202, \$9101	thin spacer	F
0	Futaba S9404	thick spacer	F
	KO PS-401, PS-2001, PS-2004, PS-2015, PS-2173, PS-2174, PS-2123, PS-2143, PS-2144	thin spacer	J



:: Driver:	:: Date:
:: Track:	
·· Fvent·	

Setup Sheet for	Team Associated's SC10				Re	v. 2
:: Front End			:: Rear End			Ę
23	camber:		123	C	camber:	
	toe:			• 6	anti-squat:	—
	9		wasl	ners: 🖁 🍙 t	toe:	
wash	ers: [0] ride height:	ABC			rear hu carrier std 0° 0.5° 1° 1.5°	rs
			ride heigl —	nt:		
bump steer spacer:	axle height up middle down	caster 20° 25° 30°		wheel base long medium short	anti-roll bar none black (soft) silver (med) gold (hard)	
:: Front Shocks			:: Rear Shock	S		
	piston: limiter:				ston: niter:	
:: Electronics						
motor & wind:_ pinion: spur gear: batteries:	nent:		throttle / brathrottle / braesc:	ake expo : th dr	rottle profile: ag brake: eering expo:	
:: Other			:: Gear Differ	ential / Ball L	Differential	
1 ,			0	: :gs:		
:: Front Tires			:: Rear Tires			
tire: compound: insert:			compound: _ insert:			
:: Race and Veh	icle Comments		:: Trac	k Info		
' '	main: finish:		tracti	on: 🗆 high 🗀 ı] clay: wet:	
						—



Associated Electrics, Inc.
26021 Commercentre Dr.
Lake Forest, CA 92630 USA
http://www.TeamAssociated.com
http://www.RC10.com
http://twitter/Team_Associated
http://bit.ly/AEonFacebook

call: (949) 544-7500 - fax: (949) 544-7501

Check out the following web sites for all of our kits,
current products, new releases, setup help, tips, and racing info!

www.TeamAssociated.com. - www.RC10.com